

Satellite Observations

Mohamed Dahoui

Mohamed.Dahoui@ecmwf.int

Office 160 Phone +44-118-9499 043

Outline



- **Data sources and role of observations**
- **Why satellite data important ?**
- **Principals of satellite measurements**
- **Satellite data usage**
- **Monitoring of satellite data**

Outline

- **Data sources and role of observations**
- **Why satellite data important ?**
- **Principals of satellite measurements**
- **Satellite data usage**
- **Monitoring of satellite data**

Role of observations

Every 12 hours we assimilate ~7,000,000 observations to correct the 100,000,000 variables that define the model's initial state..

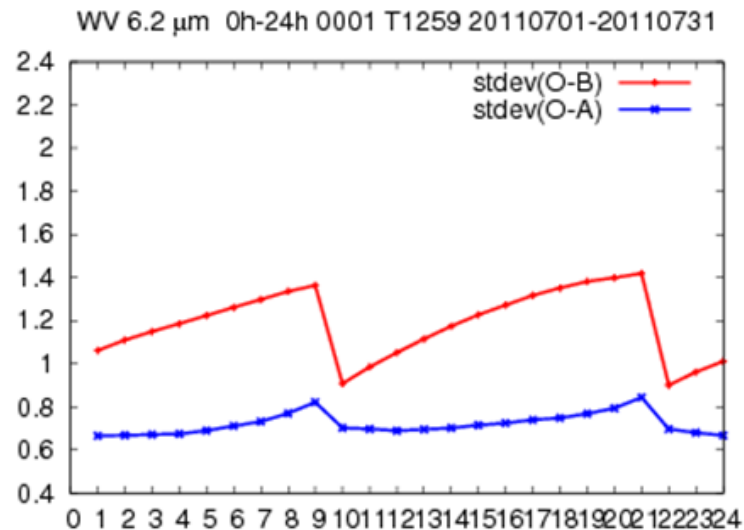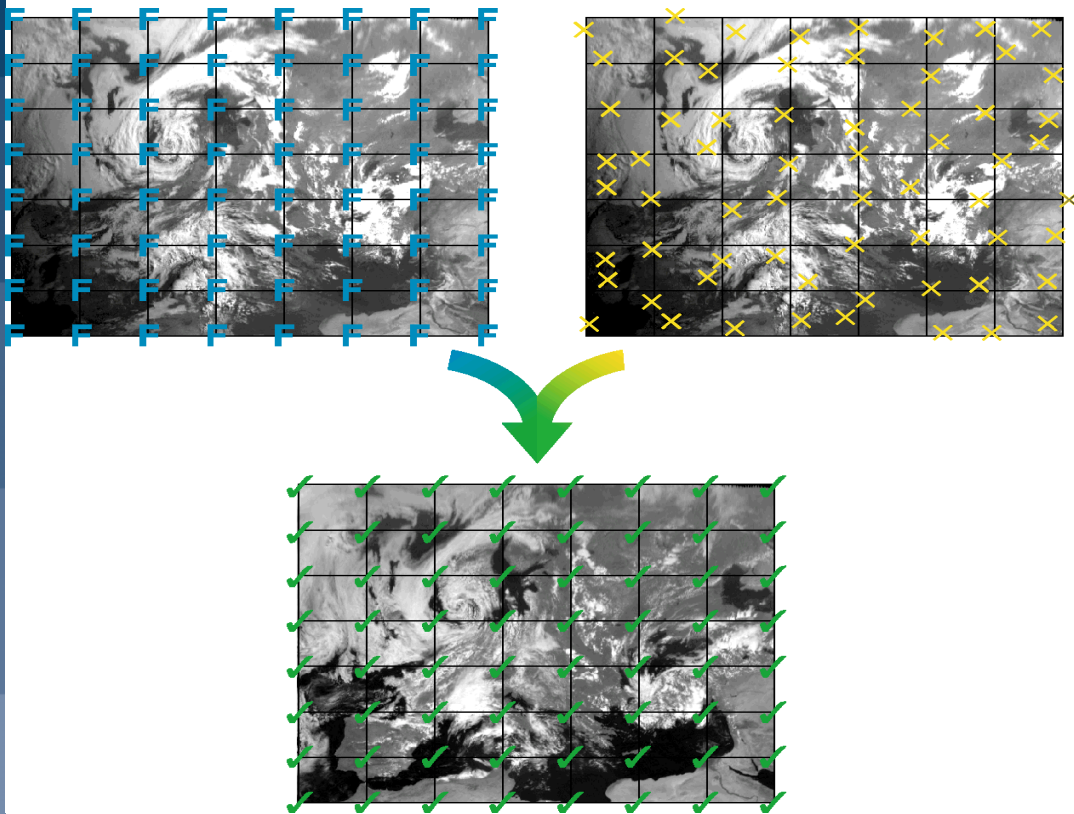

Observations limit error growth and make forecasting possible....

conventional observations

SYNOP/SHIP/METAR:

→ temperature, dew-point temperature, wind (land: 2m, ships: 25m)

BUOYS:

→ temperature, pressure, wind

TEMP/TEMPSHIP/DROPSONDES:

→ temperature, humidity, pressure, wind *profiles*


PROFILERS:

→ wind *profiles*


Aircraft:

→ temperature, pressure, wind *profiles*


Example of conventional data coverage (one month)

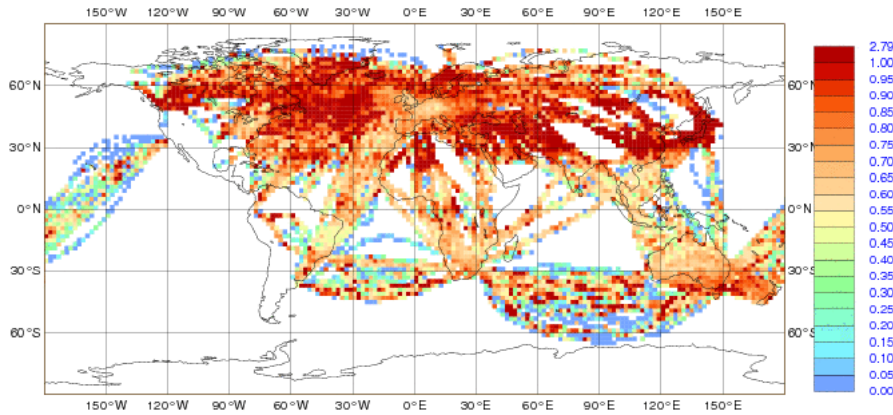


Aircraft – AMDAR

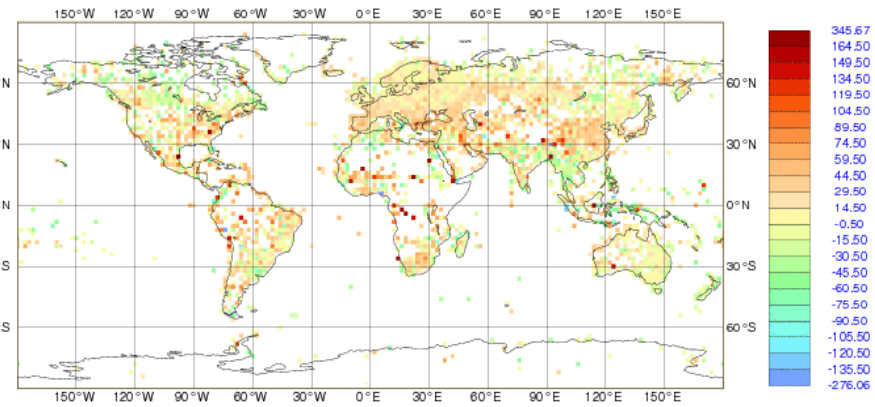

Synop

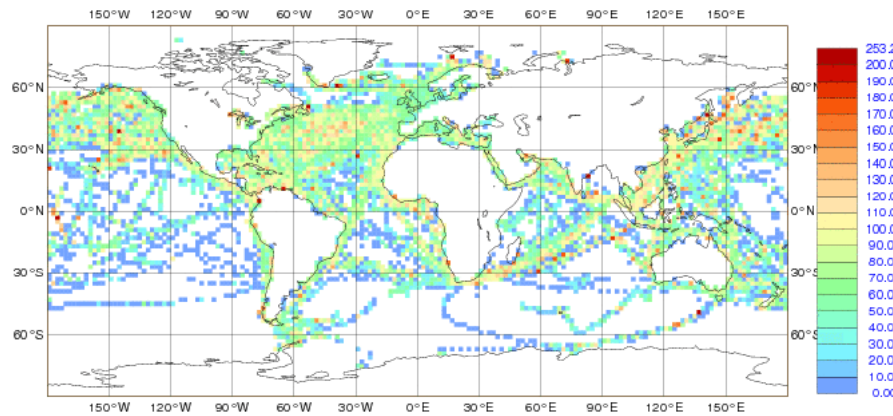


ship

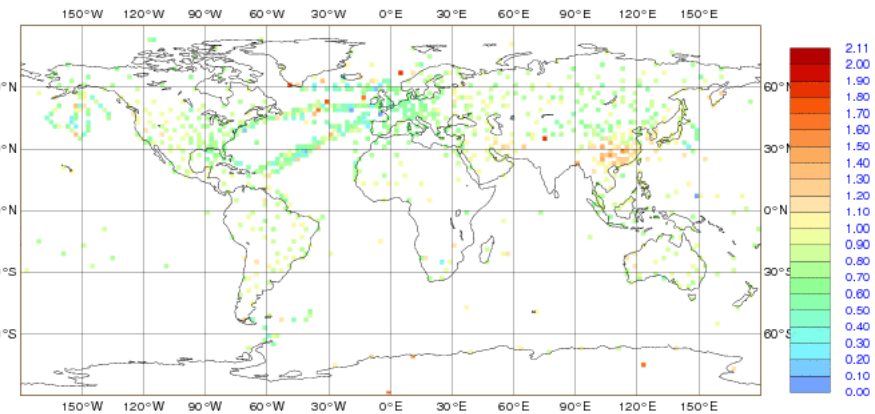


Temp

Example of 6-hourly satellite data coverage


LEO Sounders

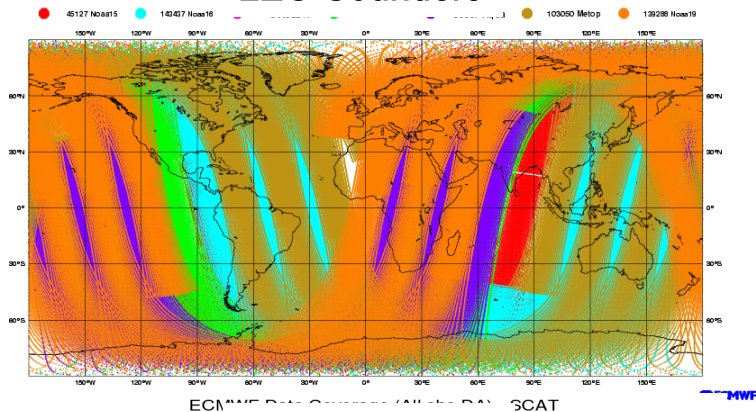


LEO Imagers

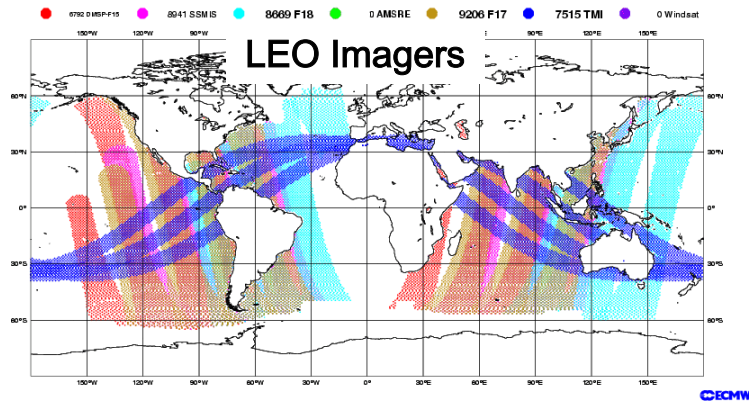


Scatterometers

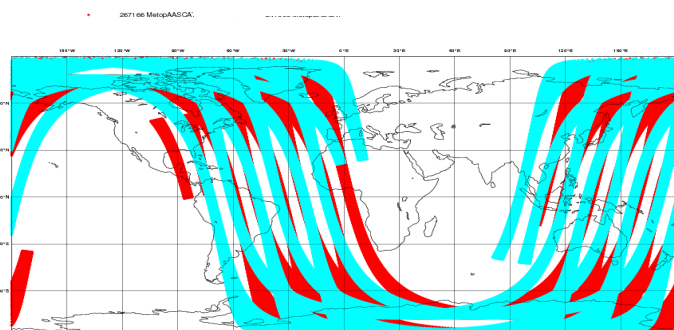


GEO imagers

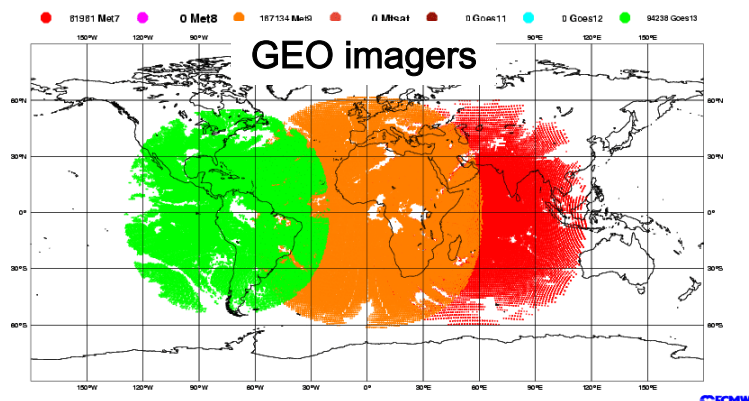

Satellite Winds (AMVs)

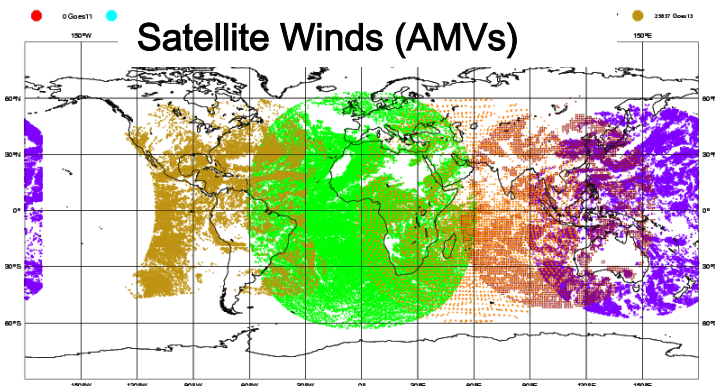


GPS Radio Occultation

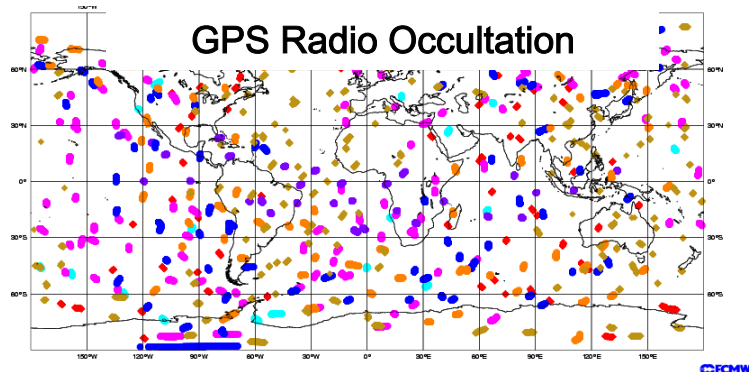


30 March 2012 00 UTC

Number of used satellite data is increasing

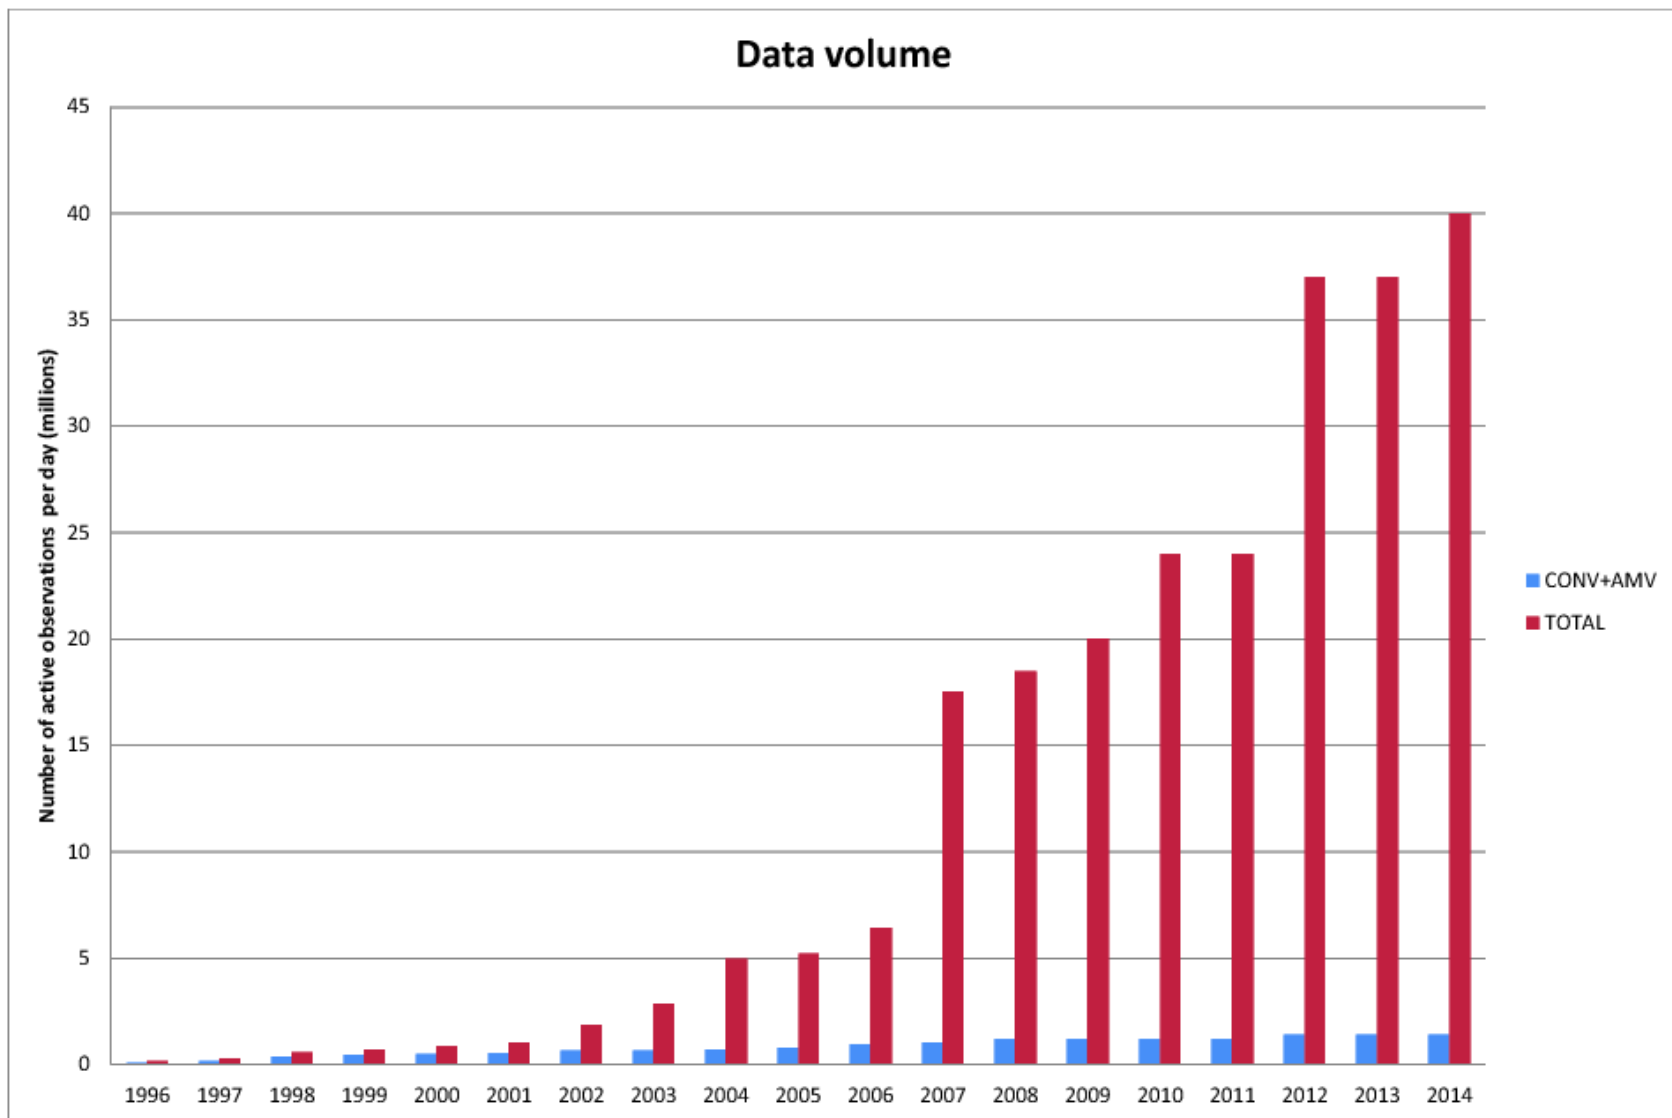

Number of used satellite data is increasing

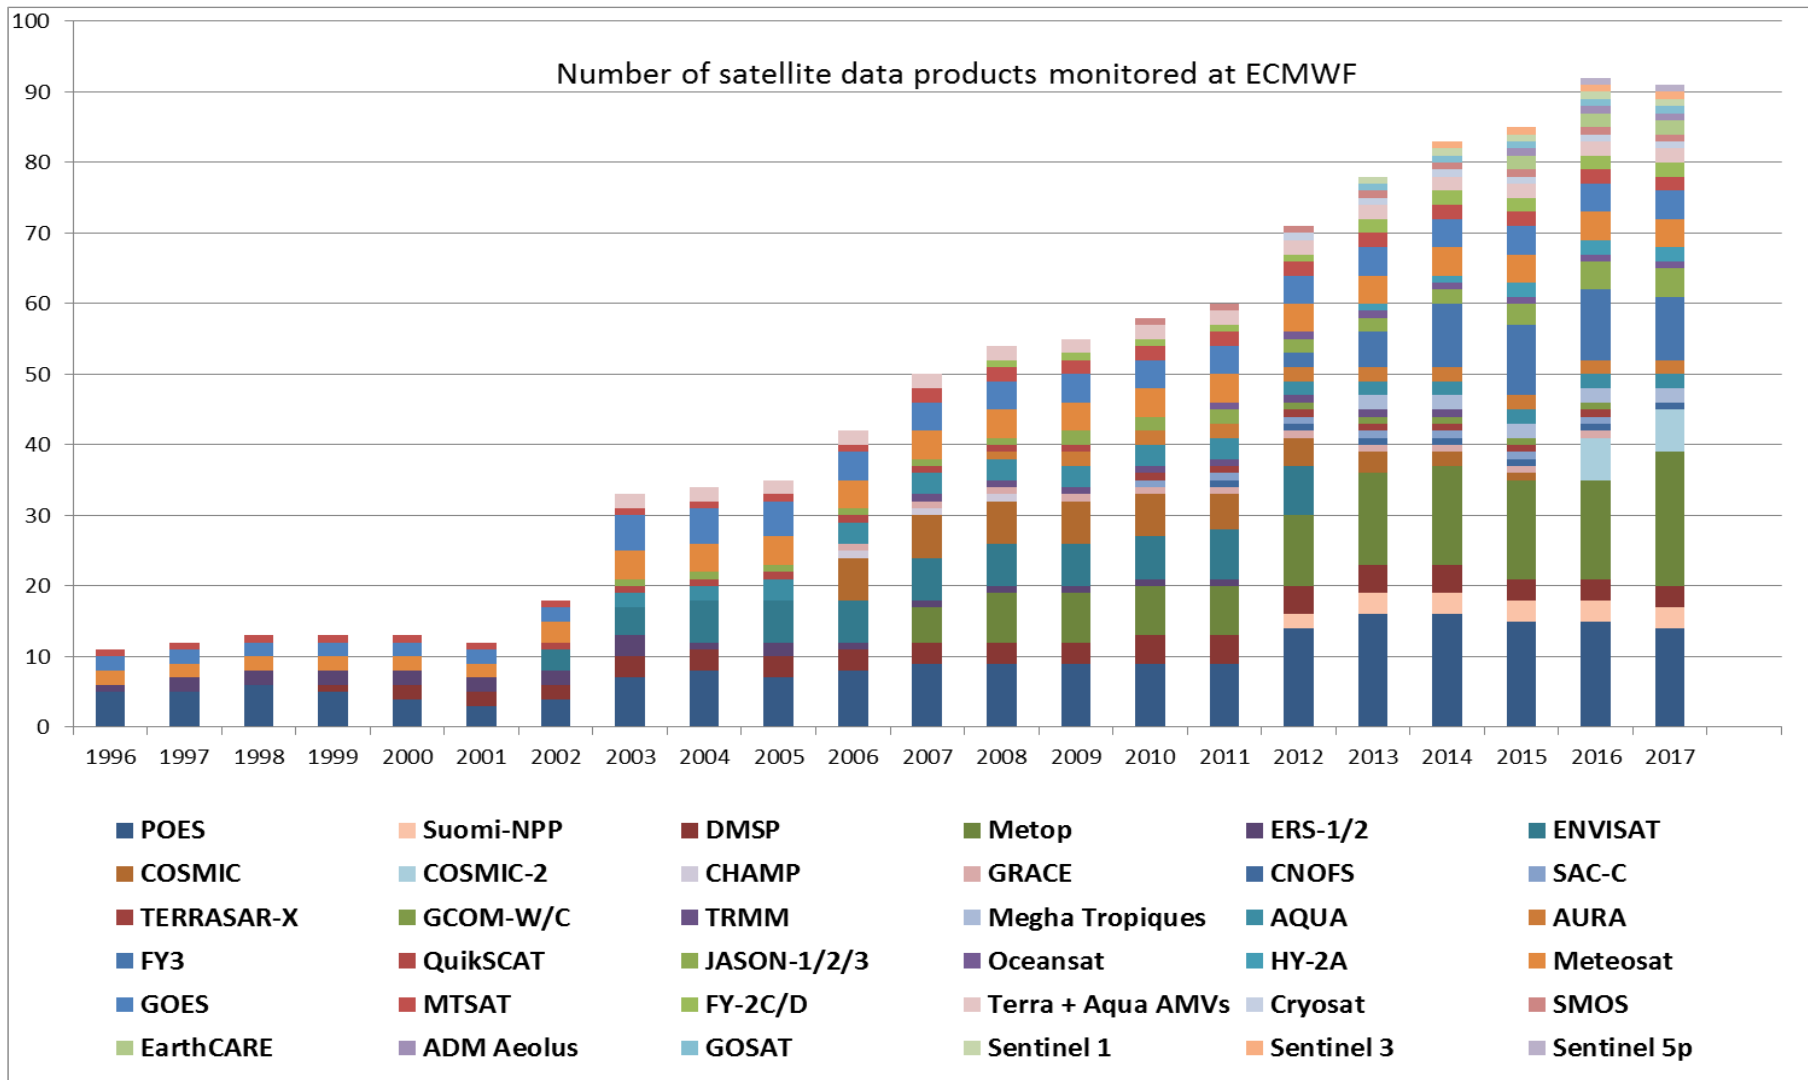

A scientific and technical challenge

Outline


- Data sources and role of observations
- **Why satellite data important ?**
- Principals of satellite measurements
- Satellite data usage
- Monitoring of satellite data

Why important ?


- **global coverage** with a high spatial and temporal resolution.
- **Vital** for less observed regions (oceans, deserts).
- **Consistent positive impact everywhere: Capacity to correct small-amplitude large scale errors**

Why important ?

Anomaly correlation of 500hPa height for northern hemisphere

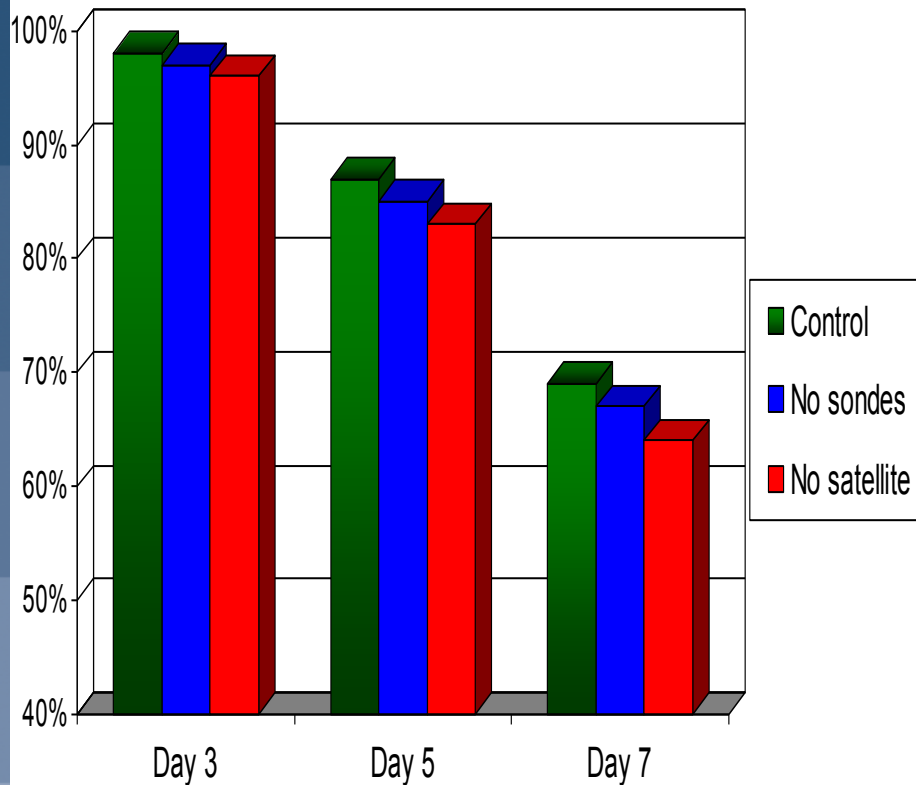



Anomaly correlation of 500hPa height for southern hemisphere

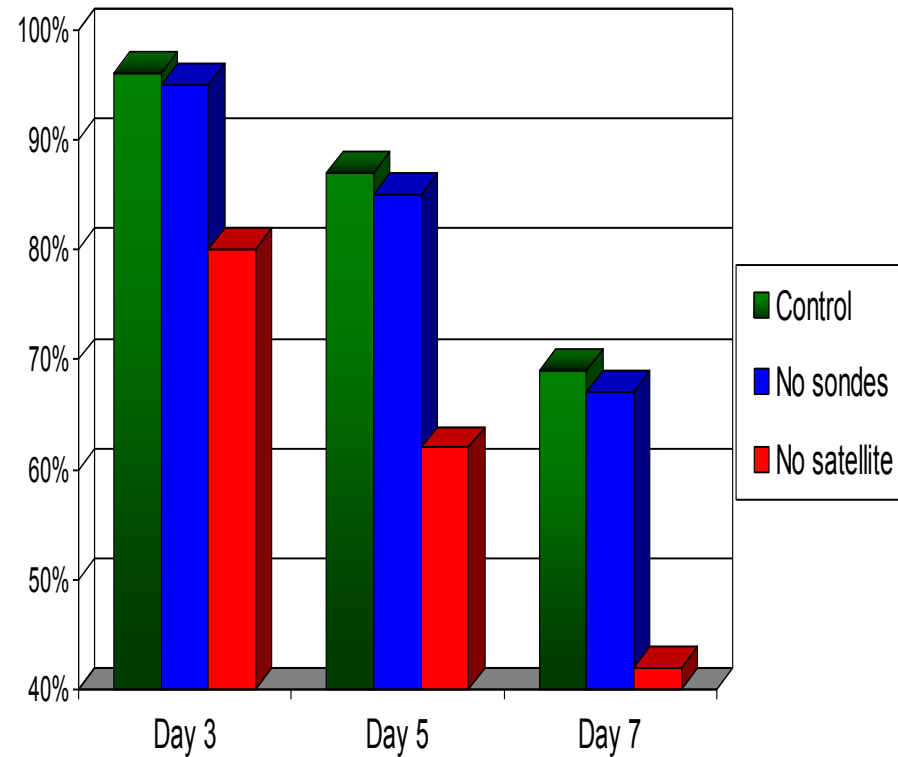

Why important ?


EUCOS Observing System Experiments (OSEs):

- 2007 ECMWF forecasting system,
- winter & summer season,
- different baseline systems:
 - no satellite data (NOSAT),
 - NOSAT + 1 AMSU-A,
 - Control (all data)

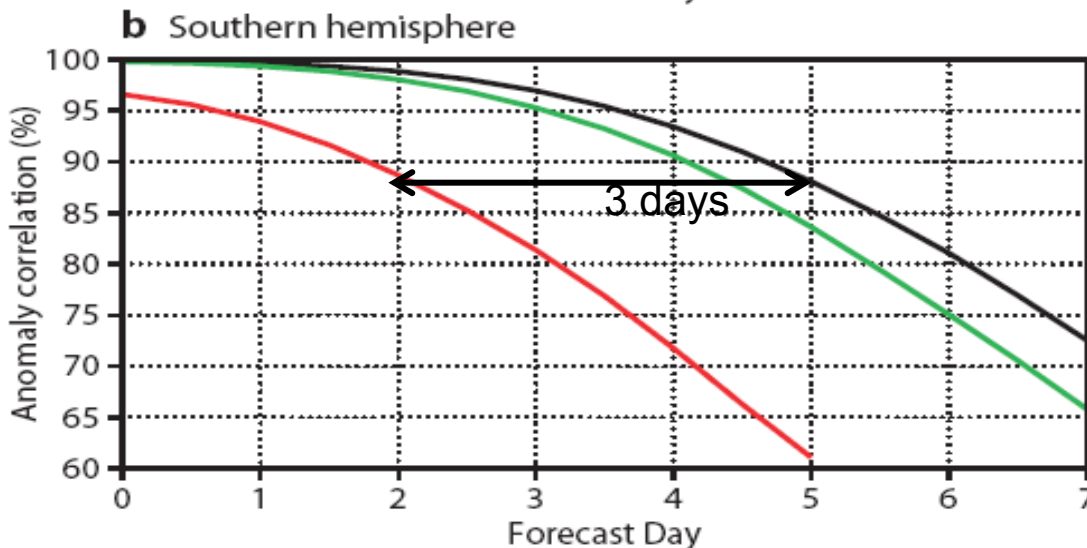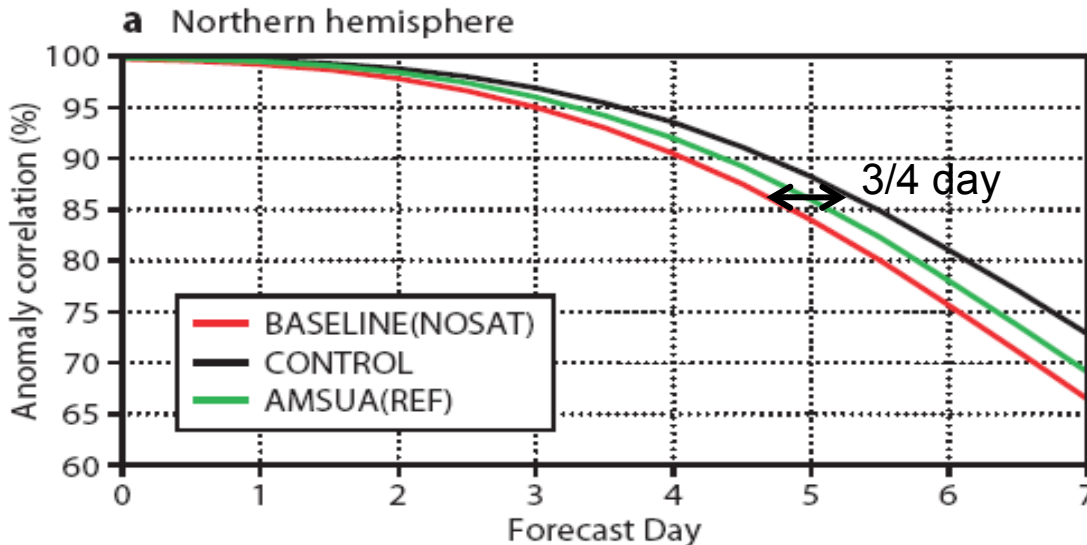

Why important ?

Forecast sensitivity to observations

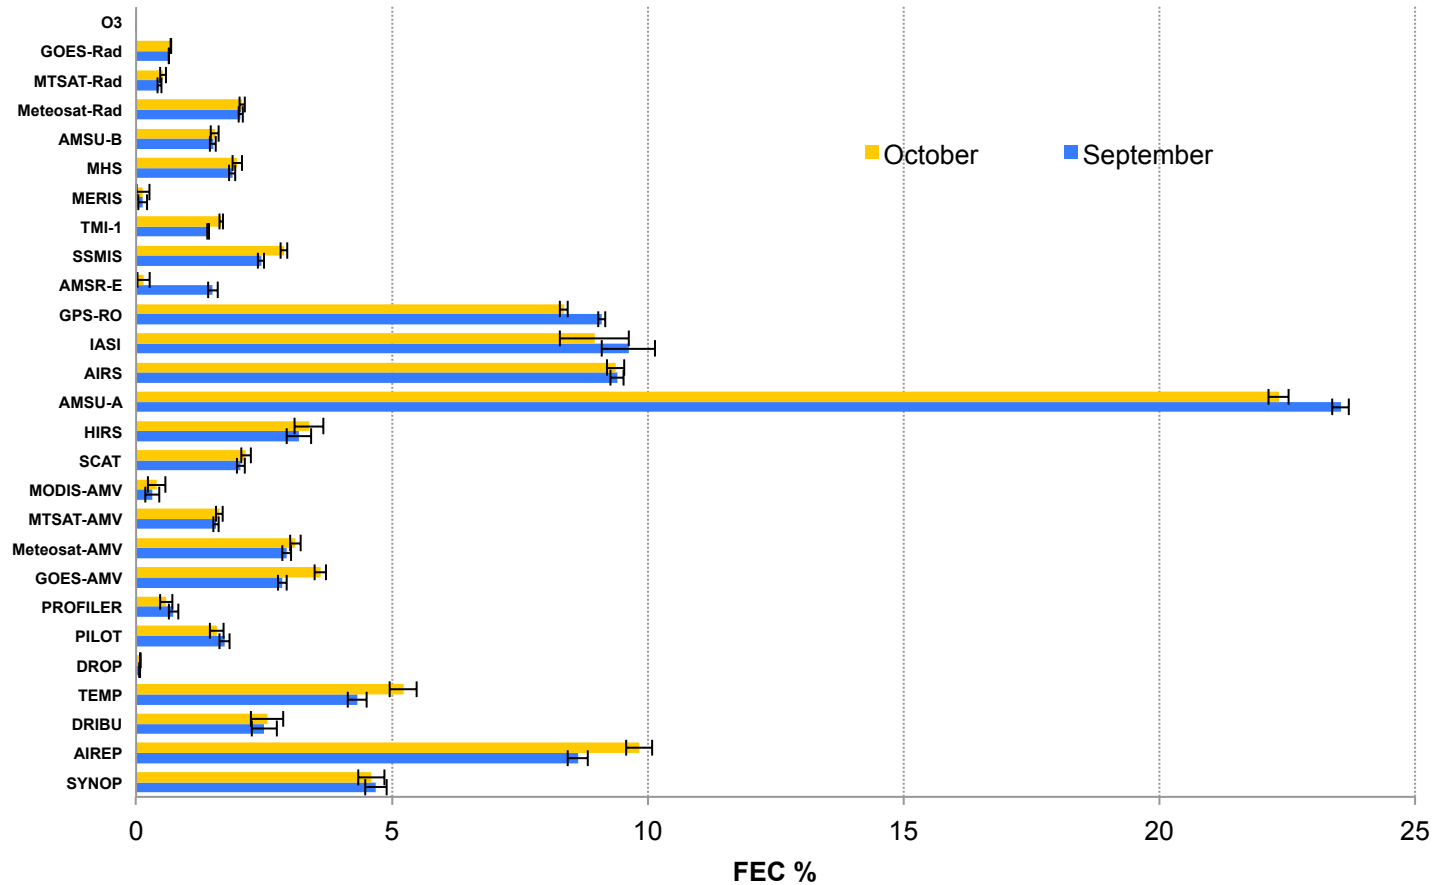


Outline

- **Data sources and role of observations**
- **Why satellite data important ?**
- **Principals of satellite measurements**
- **Satellite data usage**
- **Monitoring of satellite data**


Types of satellites

- **Geostationary satellites**
- **Low Orbiting satellites (LEO)**

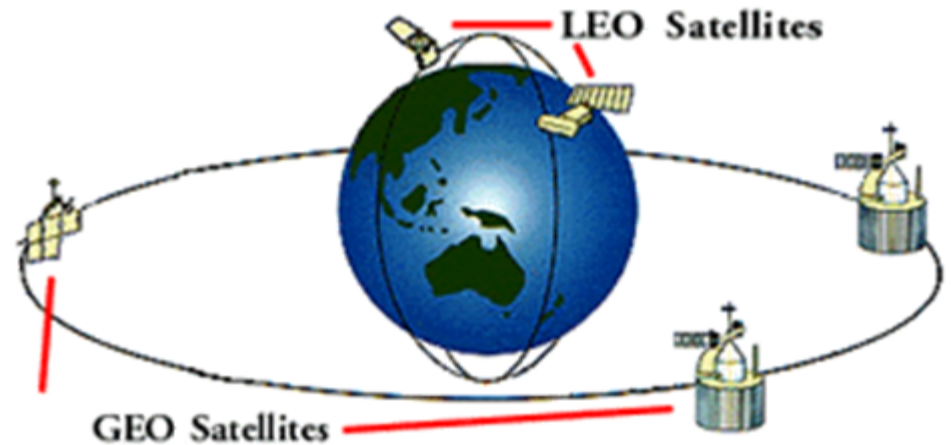

Geostationary Satellites


- **Orbits in earth's equatorial plan at heights of 36.000 Km,**
- **Satellites are stationary with respect to a point on the earth's surface,**
- **Wide coverage and high spatial and temporal resolution**

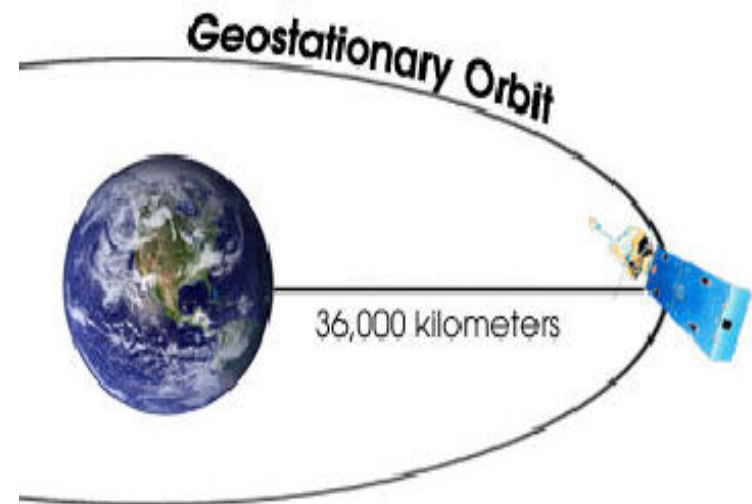

Geostationary Satellites




- **Due to the high satellite altitude, some important parts of the EM spectrum cannot be observed (e.g microwave part) and channels are generally broad (the signal is weak),**
- **Necessity of a constellation of satellites to cover the whole globe,**
- **Unsuitable to observe polar regions.**

Global Geostationary Satellite Coverage

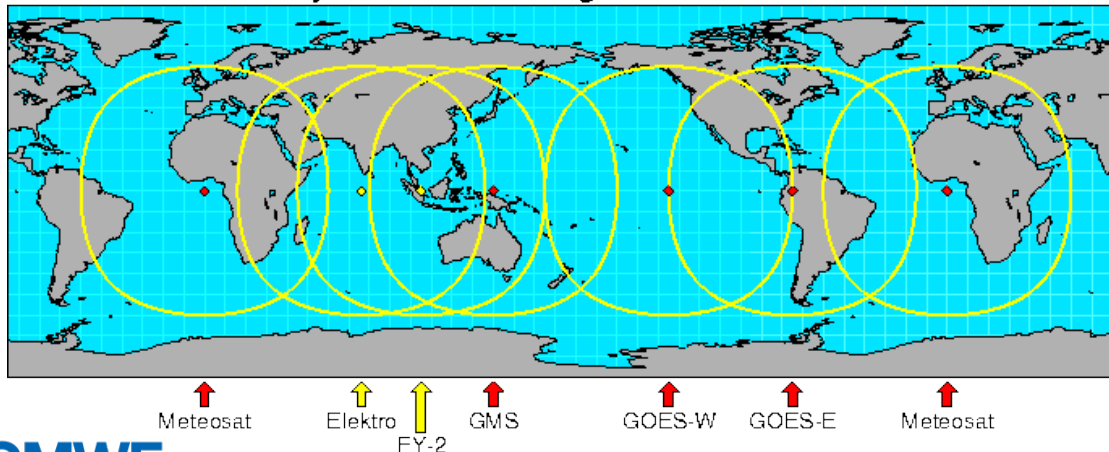

Low Orbiting Satellites

- **Orbits at heights between 400 and 850 Km**
- **Orbits are circular and pass (nearly) over the poles.**
- **Each satellite completes several orbits in one day (period between 98 and 102 min) → Global coverage with one satellite**

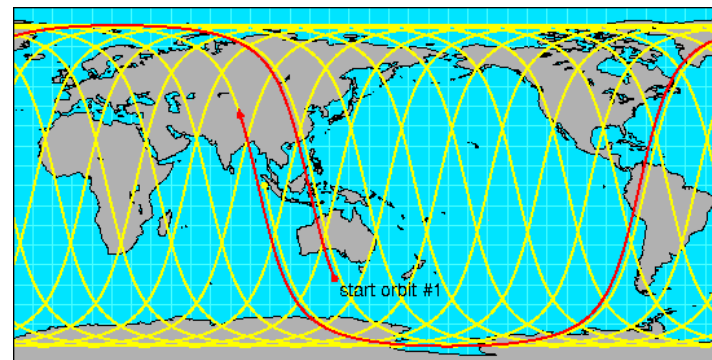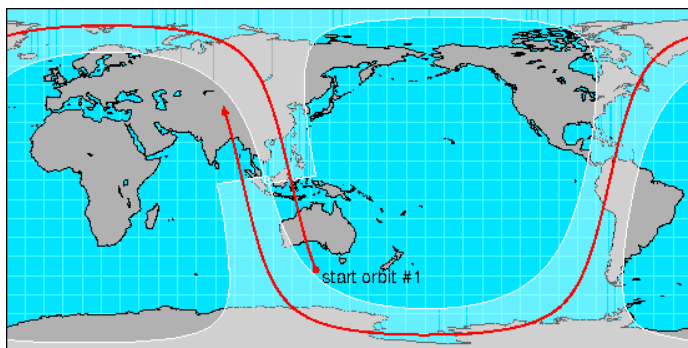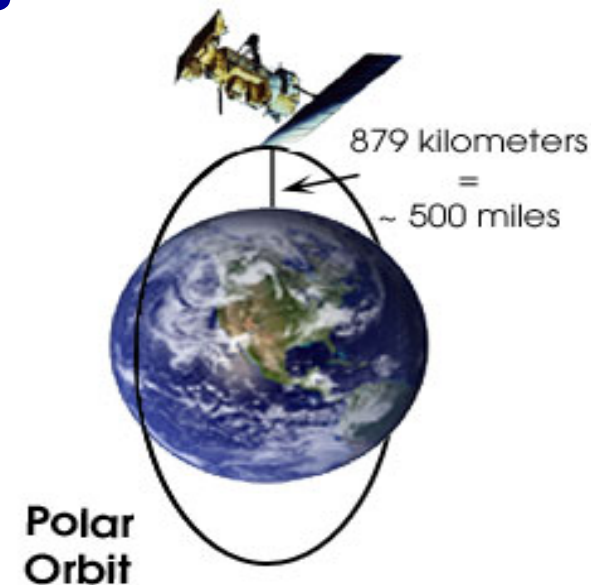

Low Orbiting Satellites

- **Due to the low orbit of satellites :**
 - **All the meteorologically useful electromagnetic spectrum can be covered (including microwave spectrum),**
 - **High spectral resolution measurements can be achieved (the noise remains less important than the real signal),**
 - **High spatial resolution**
 - **Active measurements can be achieved (e.g. radars).**
- **Moderate temporal sampling → not useful for now casting.**


What's measured ?

Satellite instruments do not measure directly
geophysical atmospheric parameters
(Temperature, Humidity, Ozone, Wind, ...)

ONLY measure out-going electromagnetic radiation from
the atmosphere at certain **frequencies**


Measured radiance is related to geophysical atmospheric
parameters by the **radiative transfer equation**

Electromagnetic radiation

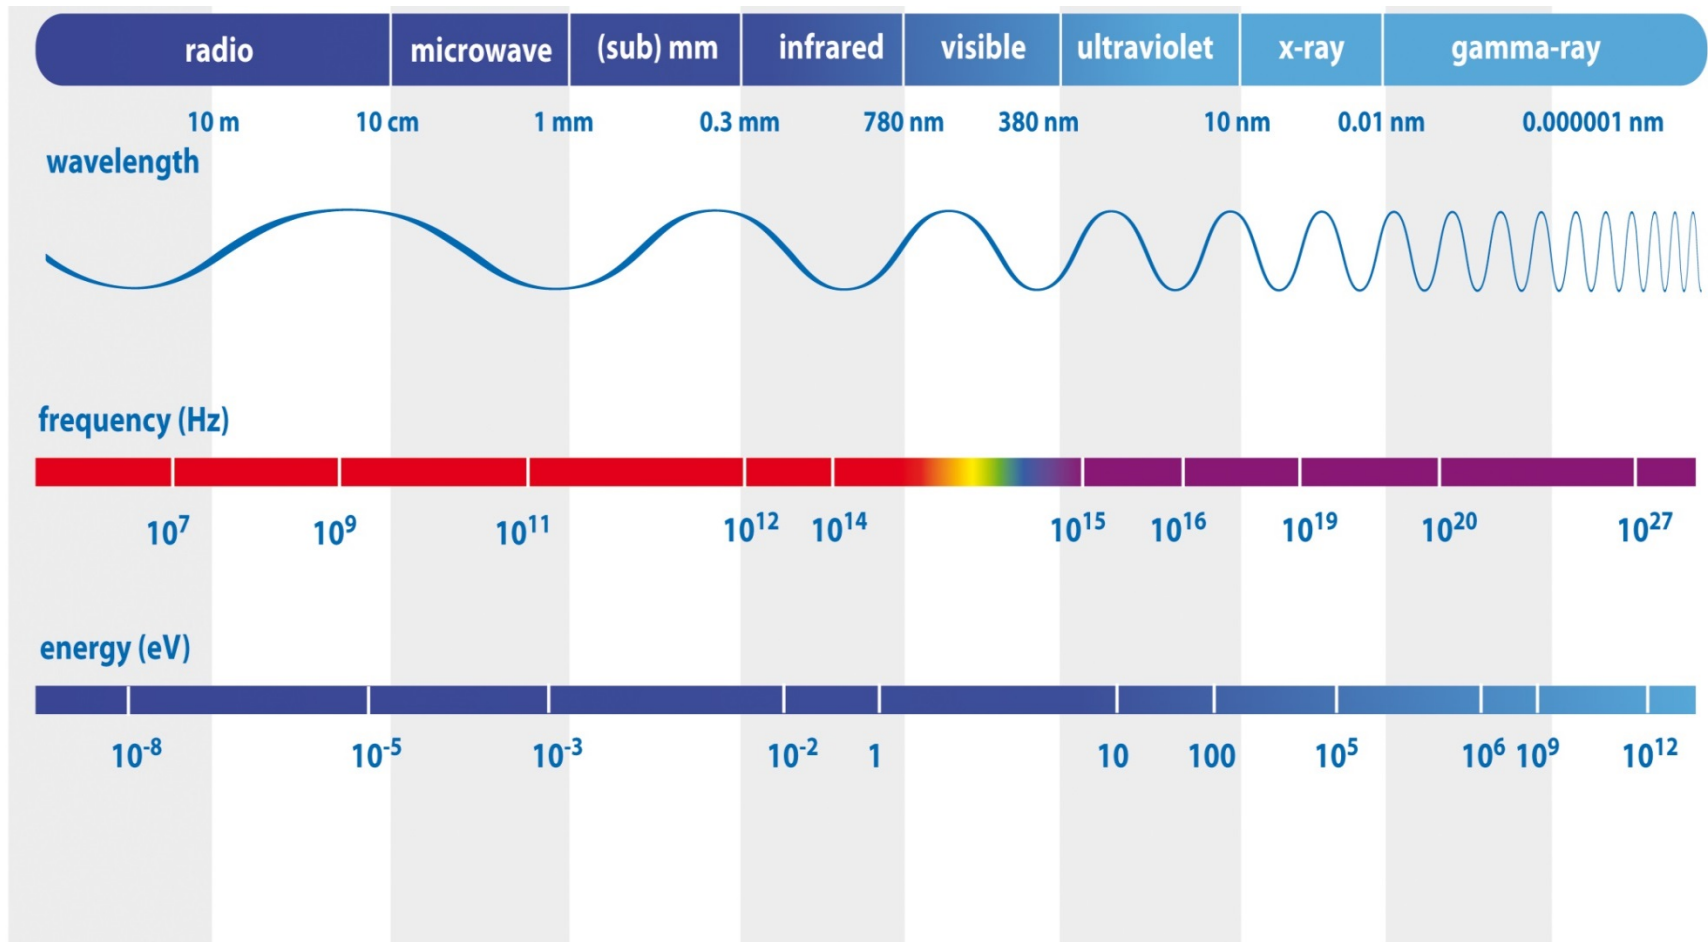

Electromagnetic radiation

Depending on the frequency, atmospheric gases either **absorb** the electromagnetic radiation or let it **transmit** freely.

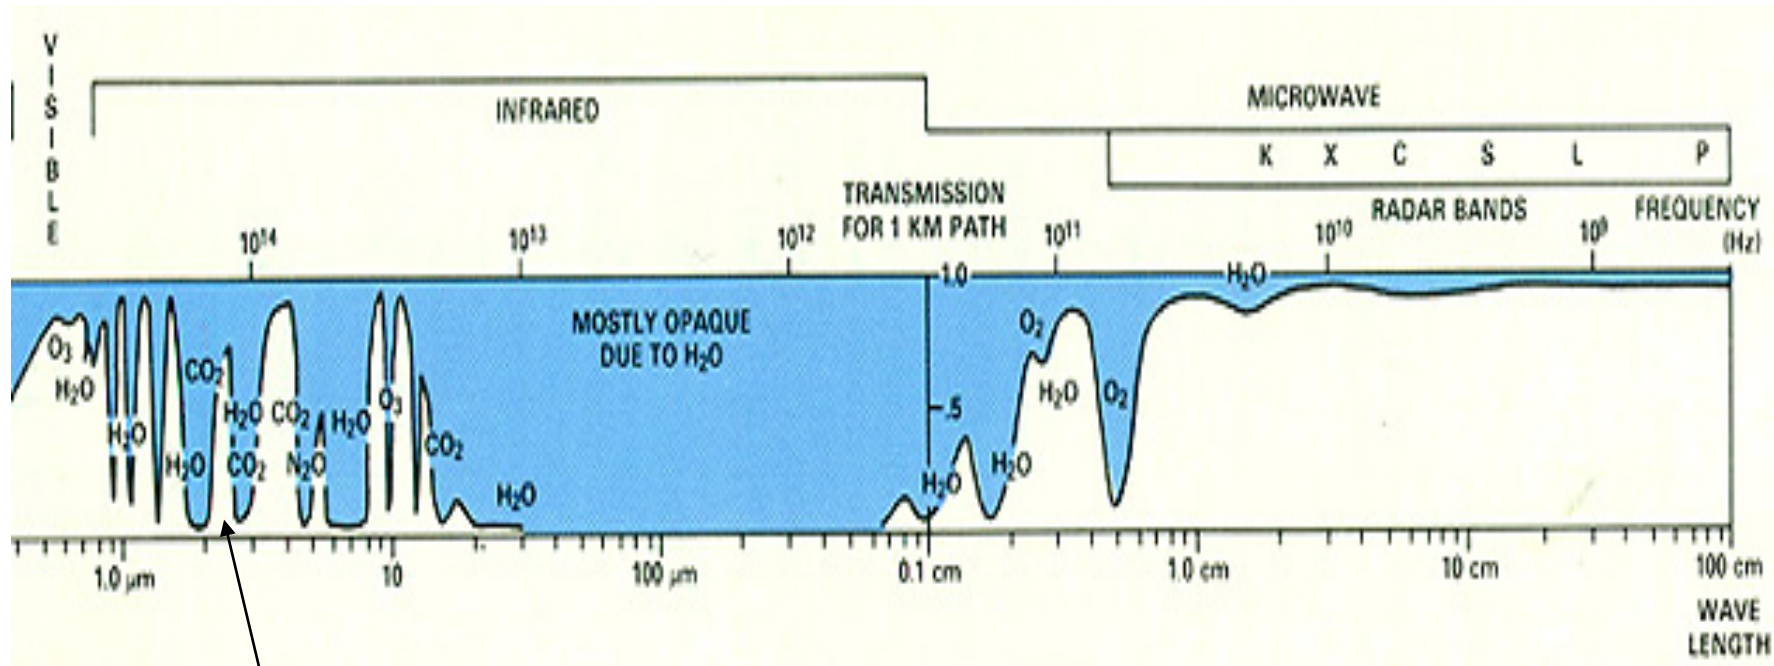


Atmospheric Windows

Radiative transfer

The **radiance** $L(\nu)$ that reaches the top of the atmosphere at a certain **frequency** ν is given by :

$$L_\nu = \int_0^\infty B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection} + \text{Cloud/Rain interaction}$$

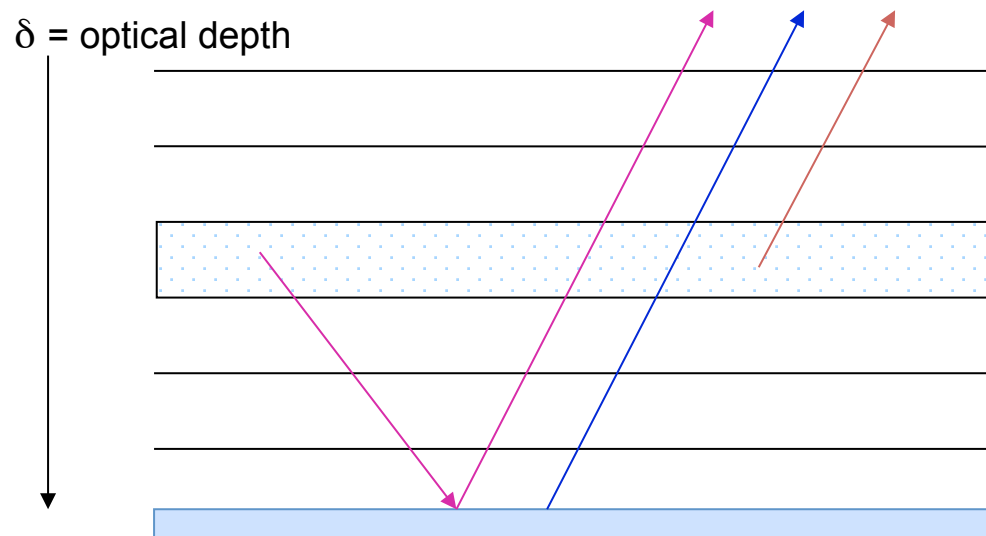

Remote sensing techniques

By the **selection** of frequencies (**CHANNELS**) satellite instruments can provide information on specific geophysical variables for different regions of the atmosphere.

- **Atmospheric sounding from passive instruments**
 - **Surface sensing from passive instruments**
 - **Satellite active sensing (scatterometry, GPS RO)**
- } Most instruments

Atmospheric Passive Sounding

- Mainly used to derive the vertical distribution of temperature, humidity and the concentration of other constituents affecting the transmittance.
- Located in parts of the infrared and microwave spectrum for which the main contribution to the measured radiance comes from the atmosphere. They avoid channels for which surface radiation is important.

$$L_\nu = \int_0^\infty B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection} + \text{Cloud/Rain interaction}$$

The equation above is enclosed in a blue rectangular box. The term $\frac{d\tau(\nu)}{dz}$ is circled in red. The terms "Surface emission", "Surface reflection", and "Cloud/Rain interaction" are each crossed out with a large red 'X'.

where: B = Planck function
τ = transmittance

z = height
ν = frequency

T = temperature

Atmospheric Passive Sounding

- **To measure the temperature we need to select frequencies for which the absorption is due to gases with quasi-fixed and known concentration (like CO₂ and O₂) → $L(\nu)$ depends only on temperature,**


e.g. Microwave bands around 60 and 120 GHz
 Infrared bands around 15 μm and 4.3 μm

- **To measure the humidity or ozone we need to select frequencies for which Water vapor or ozone are a potential absorbers.**

e.g. Infrared band near 6 μm for humidity
 Infrared band near 9 μm for ozone

Atmospheric Passive Sounding

For a given frequency ν ,
The **weighting function**
 $K\nu(z)$ has his highest
value in the atmospheric
layer which contribute to
the maximum of the
outgoing radiance

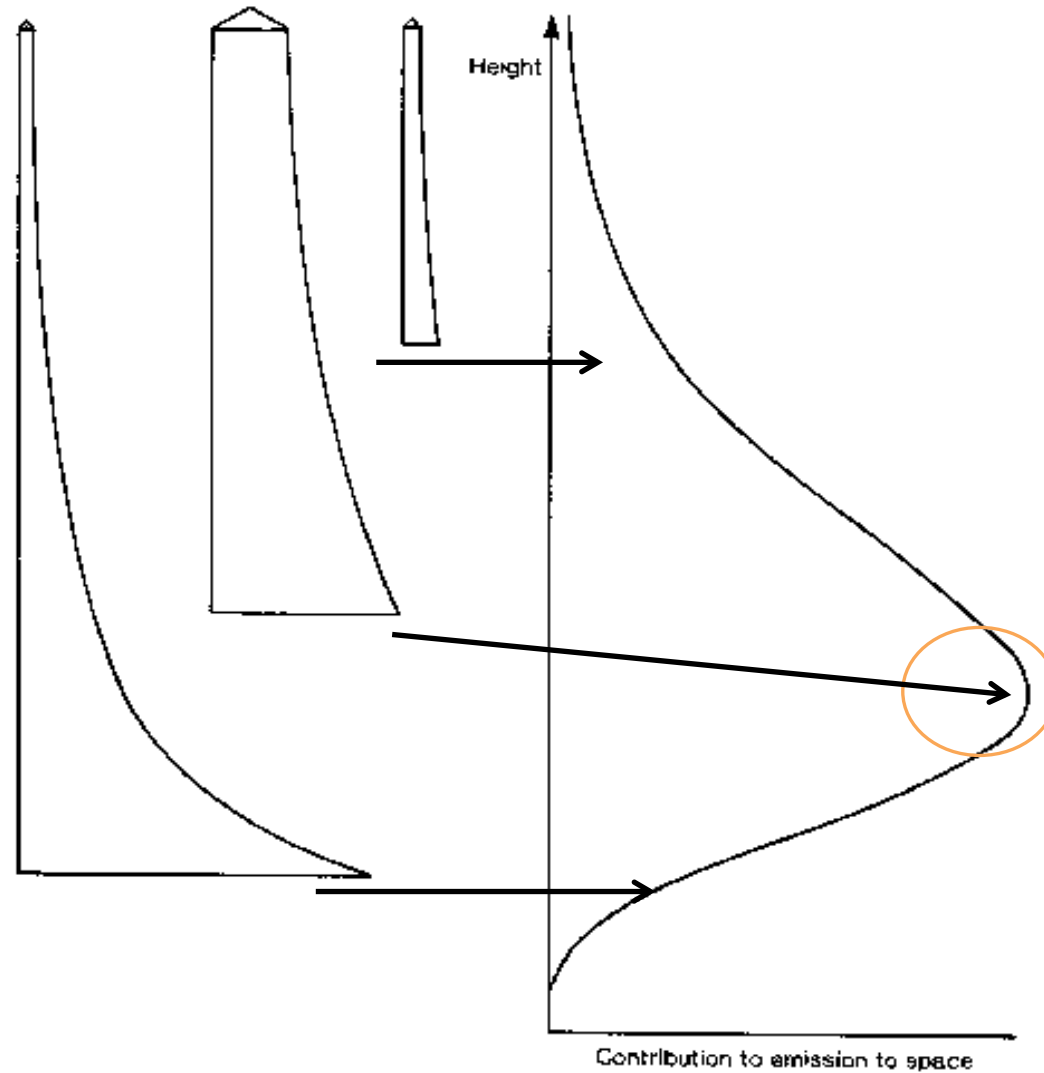


Atmospheric Passive Sounding

- **With a careful selection of frequencies, one can derive atmospheric parameters at several layers**

- **The weighting functions are broad → limits the capacity to derive small scale properties in the vertical**


- **The weighting functions are highly overlapping → limits the sampling of the vertical**

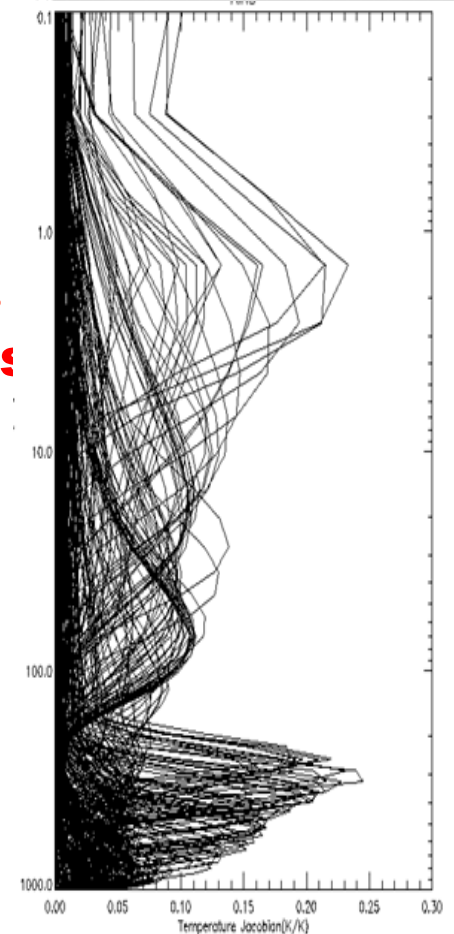

Surface sensing (passive)

These channels are located in **window regions** of the Infra-red/Microwave spectrum at frequencies where the main contribution to the measured radiance is coming from the surface:

$$L_\nu = \int_0^\infty B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection} + \text{Cloud/Rain interaction}$$



$$L(\nu) \approx B[\nu, T_{\text{surf}}] \varepsilon(\nu, \nu)$$

T_{surf} = surface temperature ε = surface emissivity

These are primarily used to obtain **information on the surface temperature** and quantities that influence the **surface emissivity** such as **wind** (ocean) and **vegetation** (land).

Satellite Active Sensing

- **Scatterometry/Altimetry**
- **GPS Radio Occultation**

Surface sensing (Active)

- These instruments (e.g. Scatterometers and altimeters) illuminate the earth's surface by emitting energy in **atmospheric window (VIS/NIR & MW)** regions and measure the radiance that is scattered back.



$$L_\nu = \int_0^\infty B(\nu, T(z)) \left[\frac{d\tau(\nu)}{dz} \right] dz + \text{Surface emission} + \text{Surface reflection} + \text{Cloud/Rain interaction}$$

The equation above is enclosed in a blue box. The terms $B(\nu, T(z))$, Surface emission , and $\text{Cloud/Rain interaction}$ are crossed out with large red 'X' marks. The term $\text{Surface reflection}$ is not crossed out.

- Provide information on surface winds, waves (**over sea**) and soil moisture (**over land**),



Active Surface sensing

Hurricane Gustave (31/08/2008) captured by ASCAT

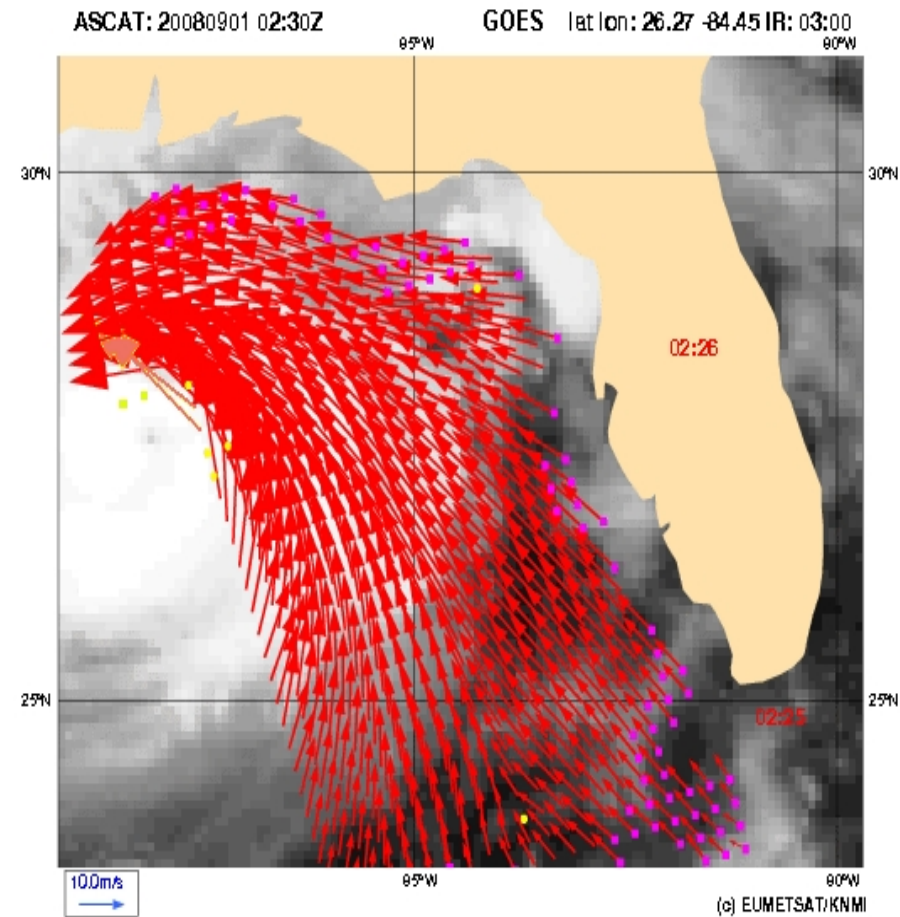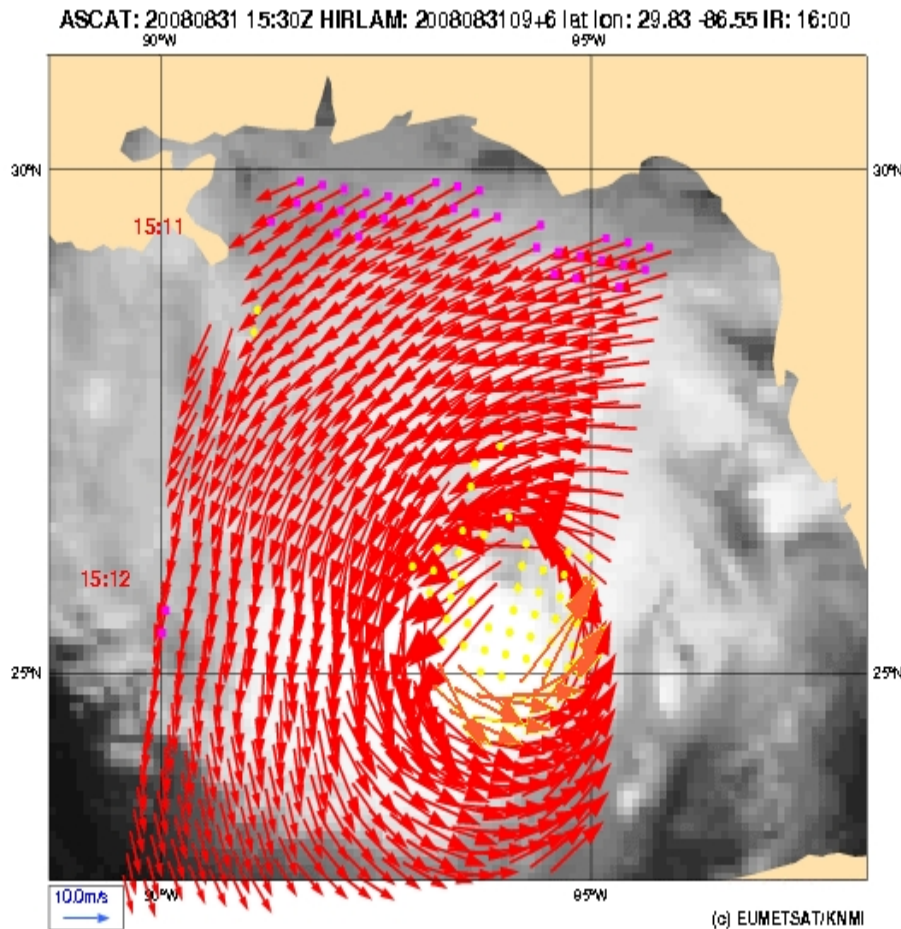


GPS Radio occultation

- The impact of the atmosphere on the radio signal propagation depends on the refractivity
- Receivers on LEOs record quasi-vertical profiles of the atmosphere (ionosphere and neutral) including :
 - Bending angle \gg
 - Refractivity \gg
 - (Temperature, humidity)

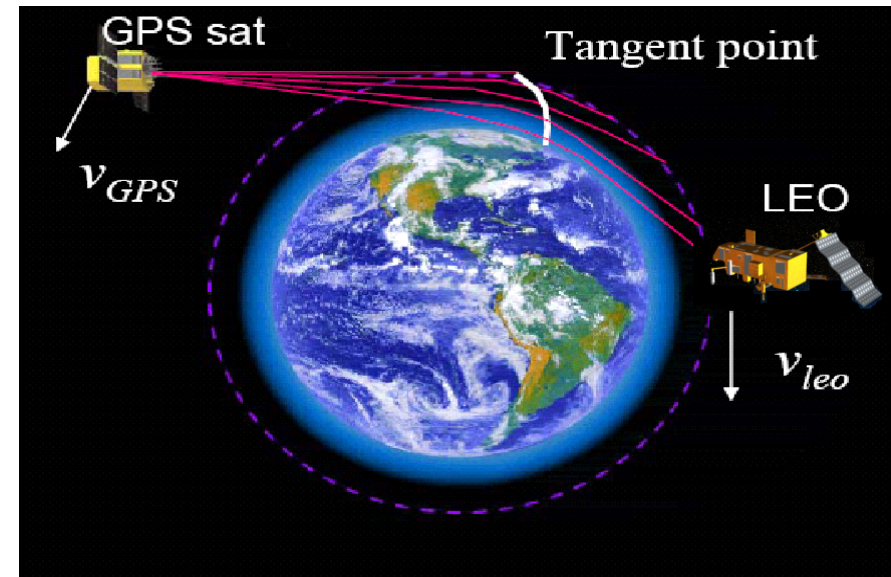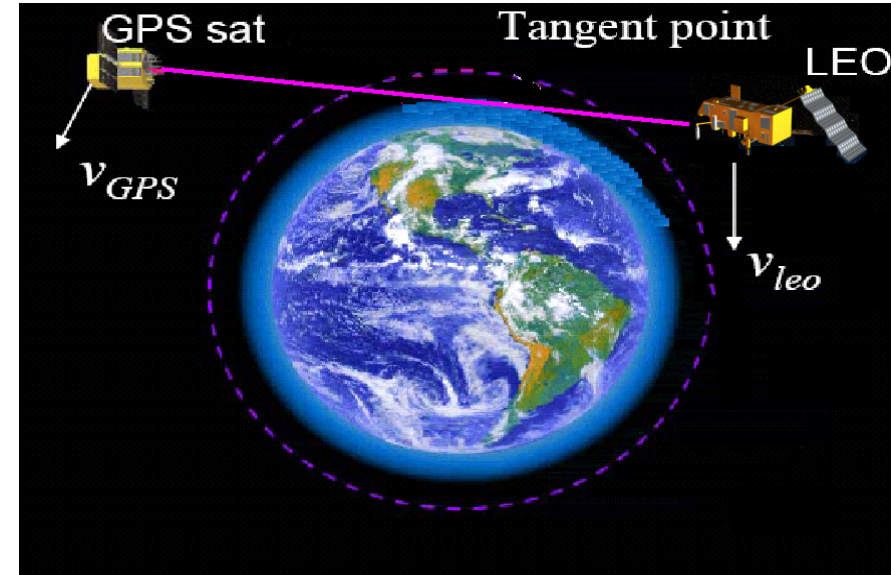

GPS Radio occultation

- High vertical resolution (~ 250 m),
- Good horizontal coverage,
- High stability in time
- All weather sensing capability (not affected by cloudy or rainy conditions),

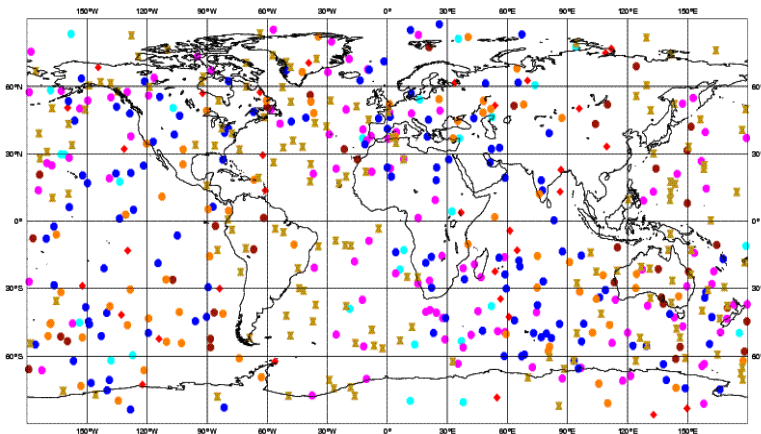


Instruments	Plateforme
HIRS (Infrared)	NOAA series, METOP
AMSU-A, AMSU-B/MHS (microwave)	NOAA, METOP-A, METOP-B, AQUA
ATMS	NPP
IASI (Infrared)	METOP-A/METOP-B
AIRS (Infrared)	AQUA
CrIS	NPP
GPSRO	CHAMP, GRACE-A, COSMIC series, METOP-A, METOP-B, TERRA-SARX
SSM/I, SSMIS (microwave), TMI, WINDSAT, AMSR2	DMSP series, TRMM, WINDSAT, GCOM-W1
MODIS (AMVs)	AQUA, TERRA
Scatterometer (surface winds, soil moisture)	METOP-A/ASCAT, METOP-B/ASCAT
Altimeter (surface winds, waves)	Jason
SBUV, OMI, GOME-2	NOAA, AURA, METOP
Imaging instruments (Radiances & derived AMVs)	METEOSAT, MSG, GEOS, MTSAT

Outline


- Data sources and role of observations
- Why satellite data important ?
- Principals of satellite measurements
- **Satellite data usage**
- Monitoring of satellite data

- At ECMWF, satellite data are principally used by the assimilation systems (4D-Var, Wave OI) to define the initial conditions for the forecast model,
- Satellite data amounts to 99% in screening and 95% in assimilation.
- Radiance data dominates assimilation with 90%.
- Relative GPSRO (limb) data amount strongly increases between screening and assimilation while ozone data is largely reduced.

Screening
24/04/2008 00UTC

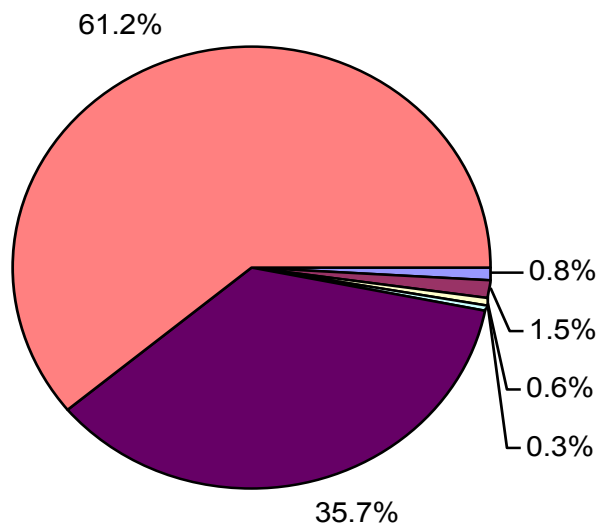


Assimilation
24/04/2008 00UTC

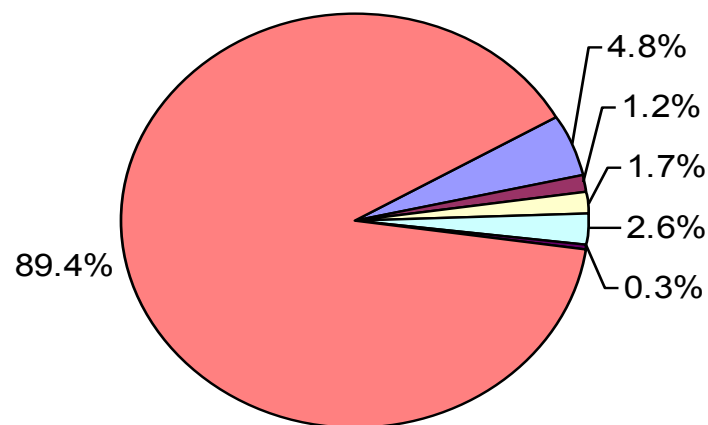


From P. Bauer

Direct assimilation of raw data

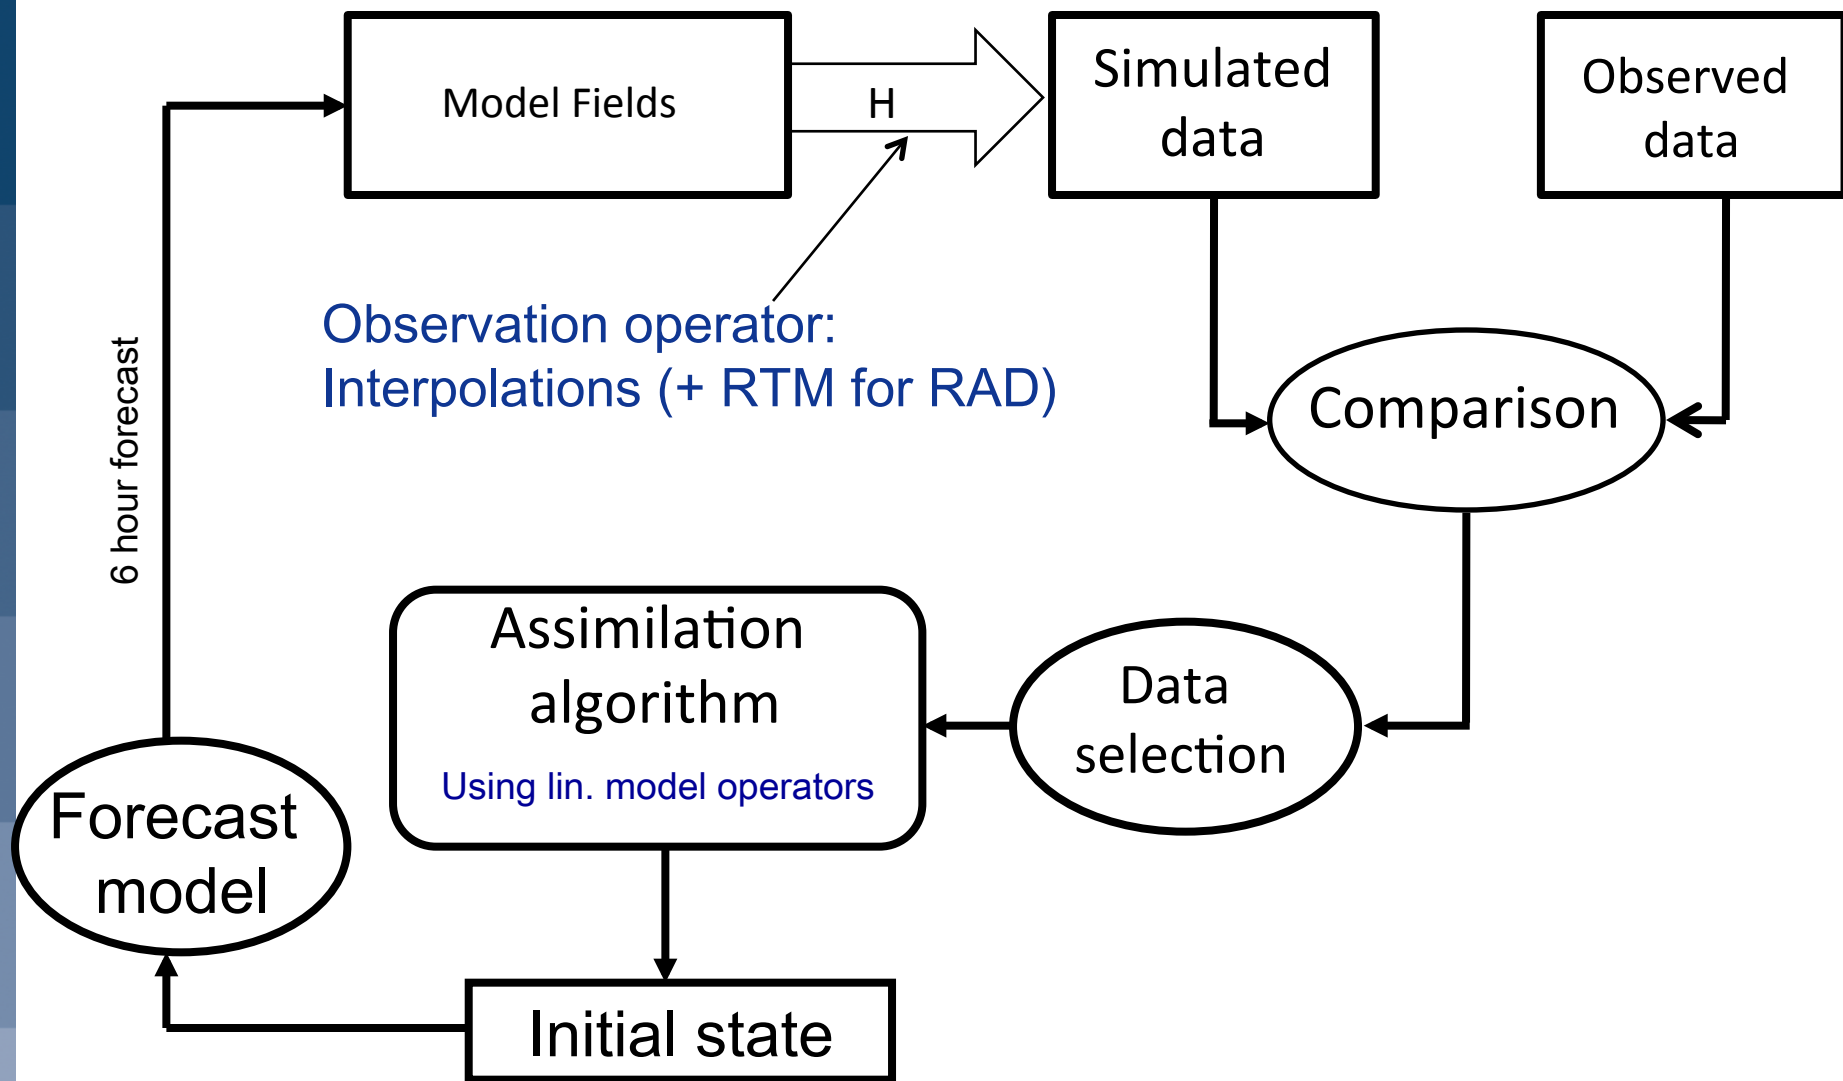


Observation operator

Met-8 IR (Observations)

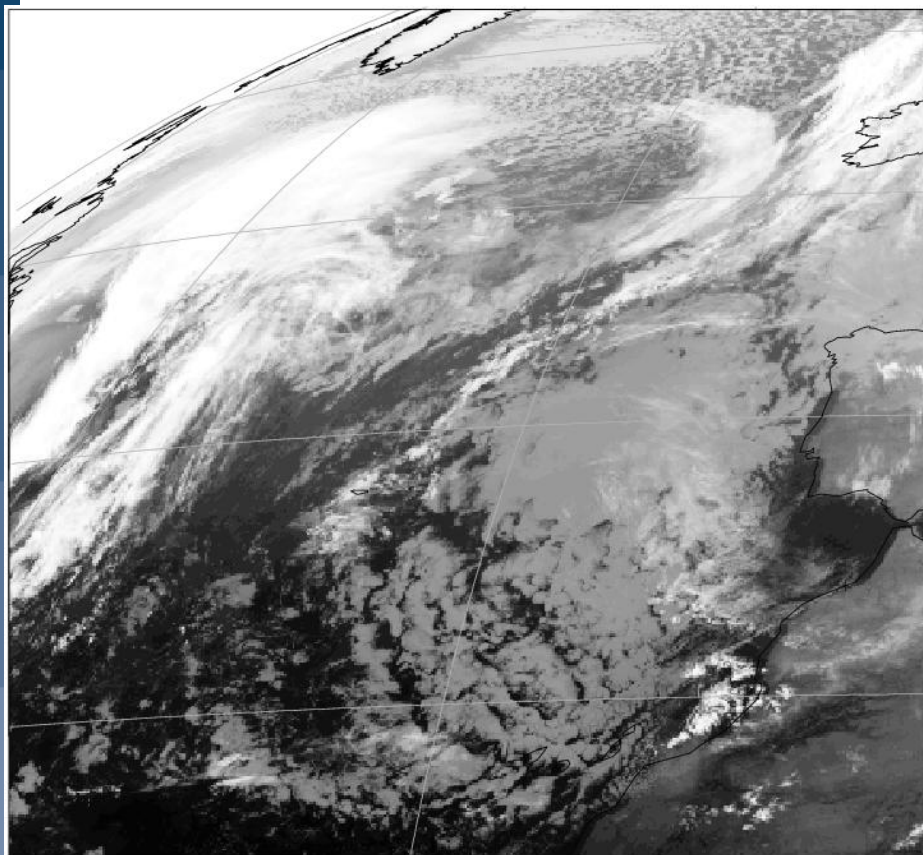

Met-8 IR (from the model)

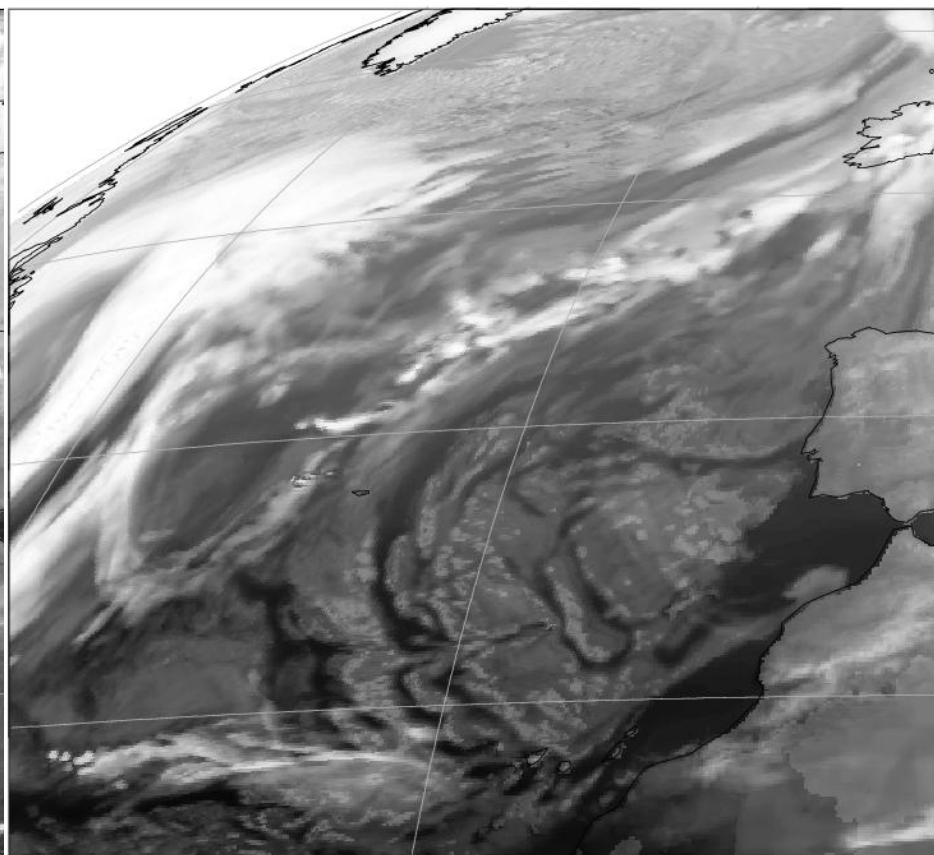

Outline

- Data sources and role of observations
- Why satellite data important ?
- Principals of satellite measurements
- Satellite data usage
- **Monitoring of satellite data**

Monitoring of satellite data

- **Data monitoring is a crucial component of the data assimilation diagnostic system. It allows the control of the availability, the quality and the impact of the observing system.**
- **Monitoring outputs are important to define and evaluate the data usage**
- **Data monitoring can help diagnosing model problems.**

Monitoring of satellite data

- **In the daily model monitoring (analysis, increments, forecasts, ...), it's generally not easy to spot the impact of satellite data,**
- **However, any important degradation of the quality or the availability of satellite data may affect, few days later, the quality of the forecasts.**
- **It's crucial to report any change in data quality or availability. This is important to trigger corrective actions (blacklisting,),**


Time series

Statistics for Radiances from Aqua / AIRS

Channel = 2104, All Data

Area: lon_w= 0.0, lon_e= 360.0, lat_n= -70.0, lat_s= -90.0 (over sea)

EXP = 0001

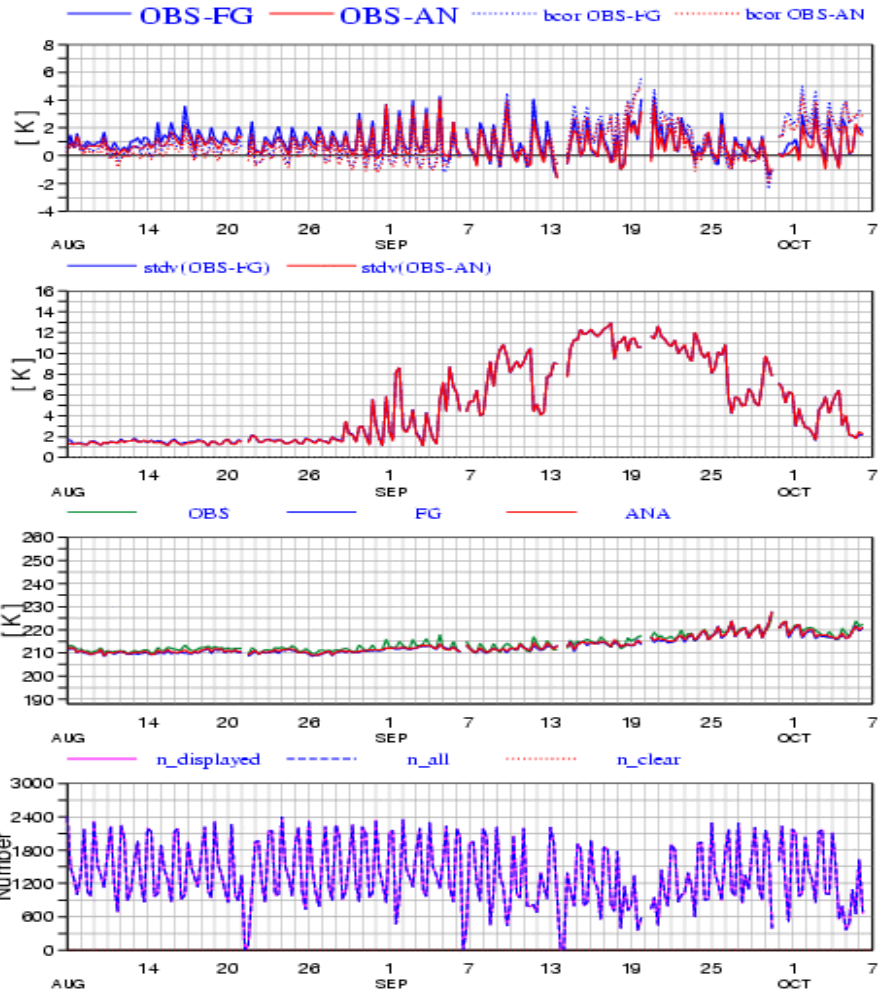


Time evolution of statistic over predefined areas/surfaces/flags

Hovmeoller diagrams

Time evolution of statistics
of zonal means or levels
means


STATISTICS FOR RADIANCES FROM AQUA / AIRS
STDV OF FIRST GUESS DEPARTURES (OBS-FG) [K] (CLEAR)
CHANNEL = 2104
EXP = 0001, DATA PERIOD = 2008080800 - 2008100700
Min: 0 Max: 21.206 Mean: 3.6350

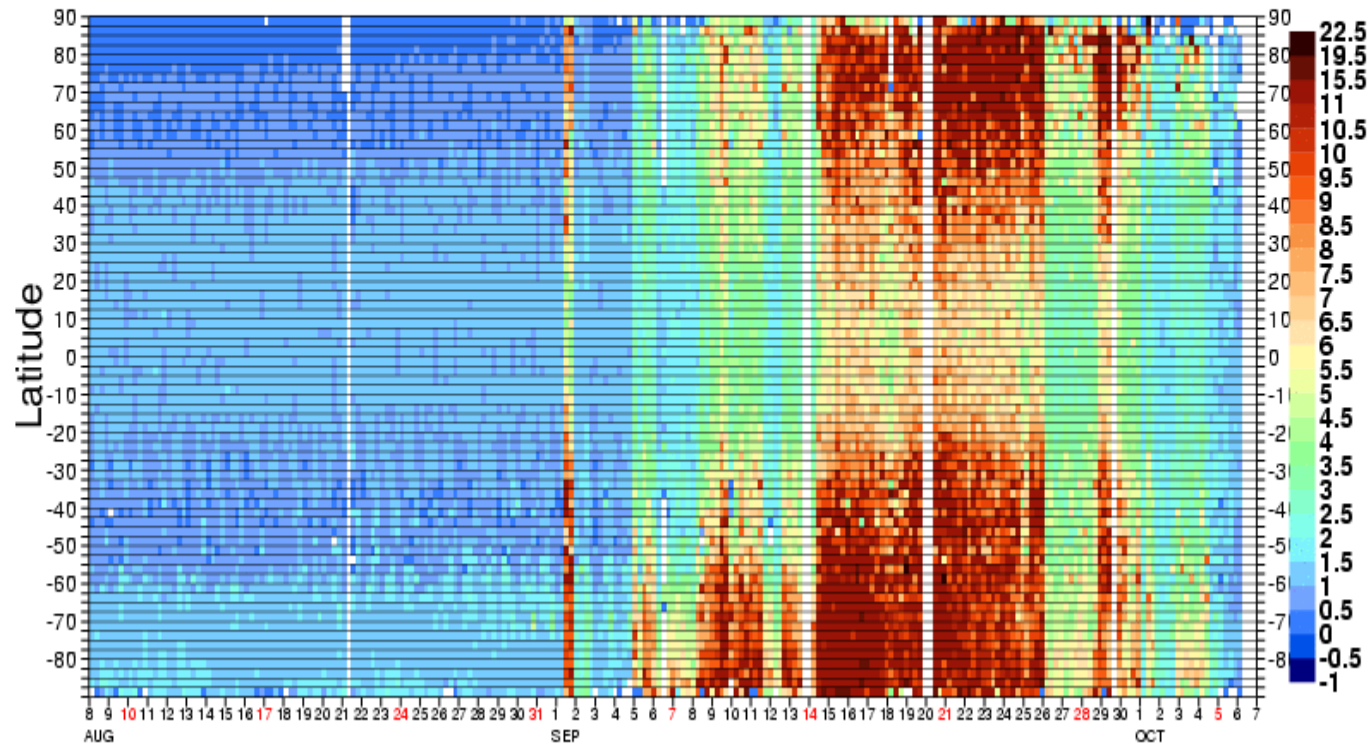

Geographical means

Assessment of the geographical variability of statistics:


- location effect
- air mass effect

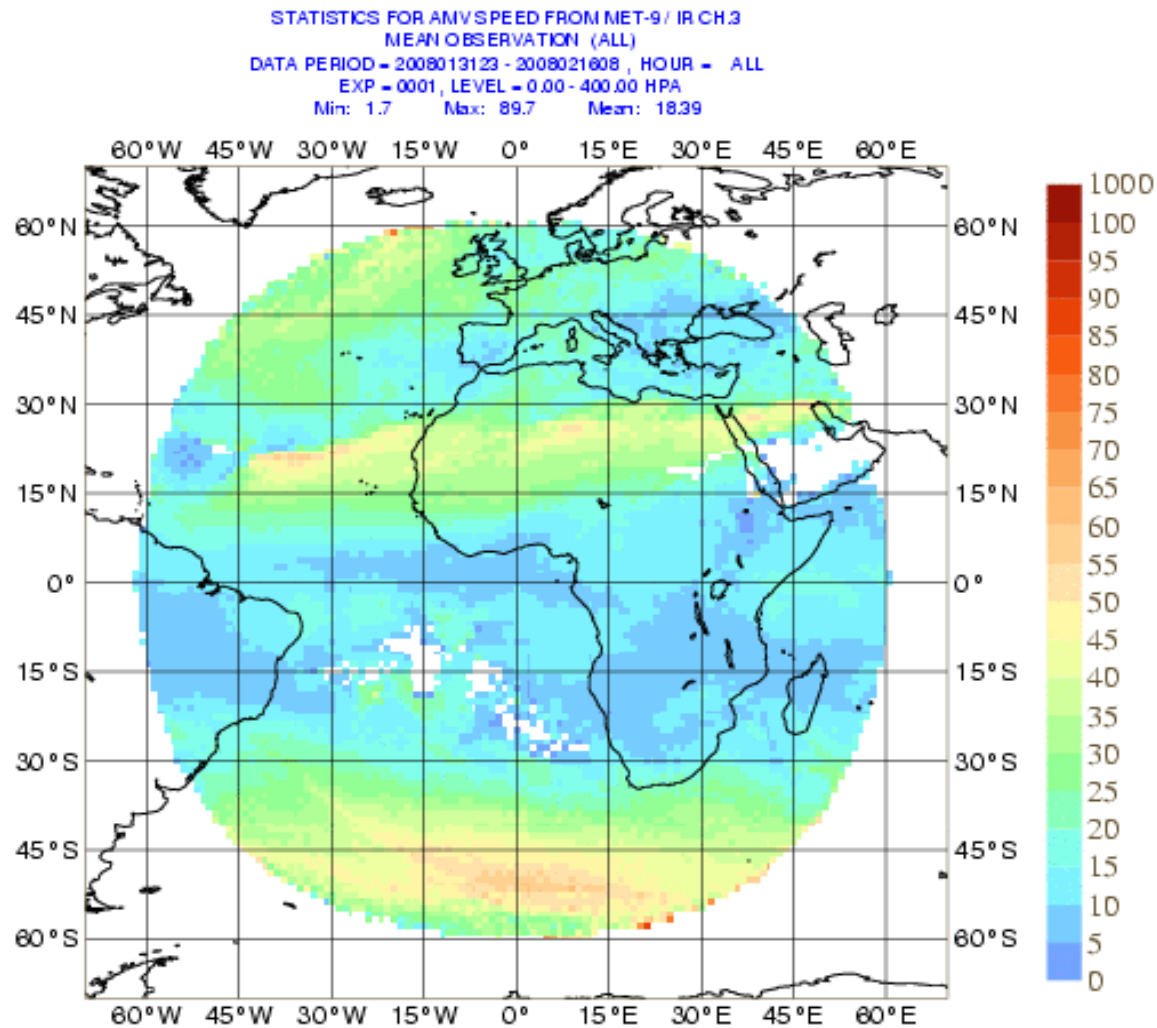

Alarm system

Selected statistics are checked against an expected range.

E.g., global mean bias correction for GOES-12 (in blue):

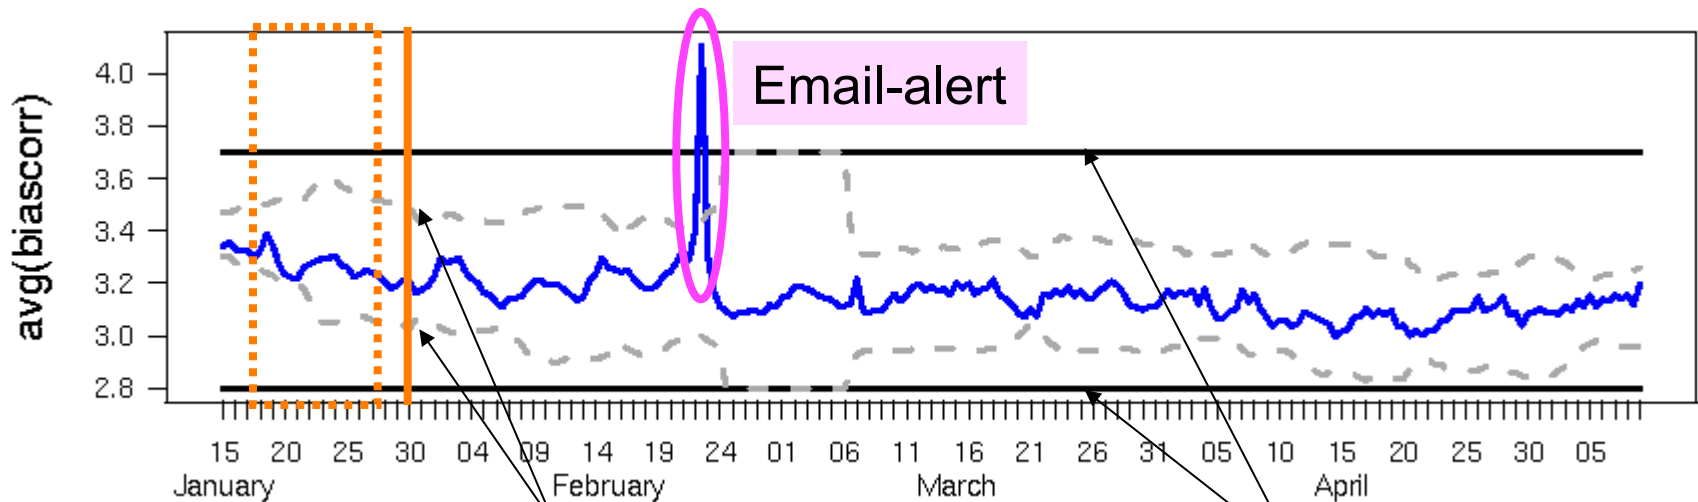

Soft limits (mean \pm 5 stdev of statistic to be checked, calculated from past statistics over a period of 20 days, ending 2 days earlier)

Hard limits (fixed)

Alarm system

Satellite Data Automatic Checking

<http://nwmstest.ecmwf.int/products/forecasts/satellite...>



[Home](#) [Your Room](#) [Login](#) [Contact](#) [Feedback](#) [Site Map](#) Search:

[About Us](#) [Products](#) [Services](#) [Research](#) [Publications](#) [News&Events](#)
Overview Forecasts Computing Modelling Newsletters Calendar
Getting here Order Data Archive Reanalysis Manuals Employment
Committees Order Software Prep.IFS Seasonal Library Open Tenders

[Home](#) > [Products](#) > [Forecasts](#) > Satellite Data Automatic Checking


Satellite Data Automatic Checking

Products

[Forecasts](#)
[Data and Software](#)
[Ordering](#)
[Catalogue](#)
[GTS Products](#)
[Operational](#)
[Upgrades](#)

An experimental automatic satellite data checking system has been implemented recently at ECMWF. It triggers the production of alarm messages if an anomaly is detected in the quality or the availability of the satellite data assimilated by the model.

Selected statistical parameters (number of observations, bias correction, and mean bias-corrected background and analysis departures) are checked against an expected range. An appropriate alert message (including a time series plot) is generated if statistics are outside the specified ranges. A severity level (slight, considerable, severe) is assigned to each message depending on how far statistics are from the expected values. Two kinds of ranges are used by the automatic checking: Soft and Hard limits. Soft limits are updated automatically using statistics from the last twenty days (extremes are excluded during this process). Hard limits are adjusted manually when required.

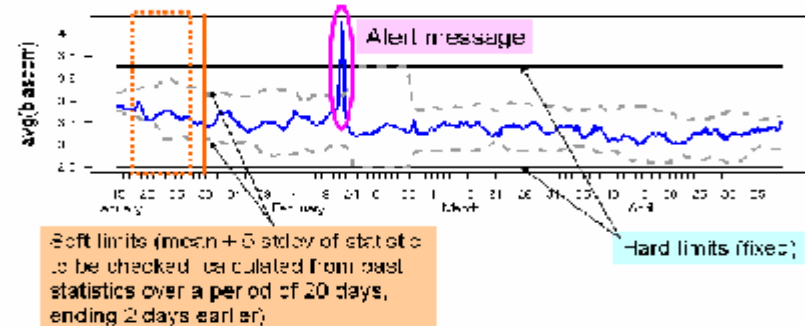

Currently, the automatic checking is limited to data passing through the minimisation process (including VarBC passive data). It's being applied, twice a day, to the long cut-off 4D-VAR cycles (DCDA).

- [Experimental Satellite Data Checking for 2008110412 DCDA](#)
- [Experimental Satellite Data Checking for 2008110400 DCDA](#)

http://www.ecmwf.int/products/forecasts/satellite_check/

24.10.2008



© ECMWF

Diagnosing model problems

When statistics from independent data types show a consistent jump it's most likely due to model problems:

Stratosphere: Microwave and Infrared data from various satellites.

Troposphere: Microwave and Infrared radiances from various satellite

Surface: Microwave and scatterometer data from various satellites.

Diagnosing model problems

Early January 2013, the automatic alarm system generated severe alarms associated to an increase of the noise for infrared and microwave stratospheric peaking channels

Checking 0001 DCDA 2013010212

=====

AQUA AIRS 56 radiances : out of range:

(3 times in last 10 days for at least one item)

[http://www.ecmwf.int/products/forecasts/satellite_check//do/get/satcheck/3215/110485?](http://www.ecmwf.int/products/forecasts/satellite_check//do/get/satcheck/3215/110485?showfile=true)

showfile=true

Severely: stdev(fg_depar)=0.777,

expected range: 0.57 0.68

Slightly: avg(biascorr)=-0.02000005,

expected range: -0.37 -0.05(H)

METOP-A IASI 89 radiances : out of range:

(6 times in last 10 days for at least one item)

[http://www.ecmwf.int/products/forecasts/satellite_check//do/get/satcheck/3217/111259?](http://www.ecmwf.int/products/forecasts/satellite_check//do/get/satcheck/3217/111259?showfile=true)


showfile=true

Severely: stdev(fg_depar)=0.459,


expected range: 0.33 0.41

Diagnosing model problems

AQUA AIRS 56 radiances
Active data, EXP_0001
airs_784_11_56_210

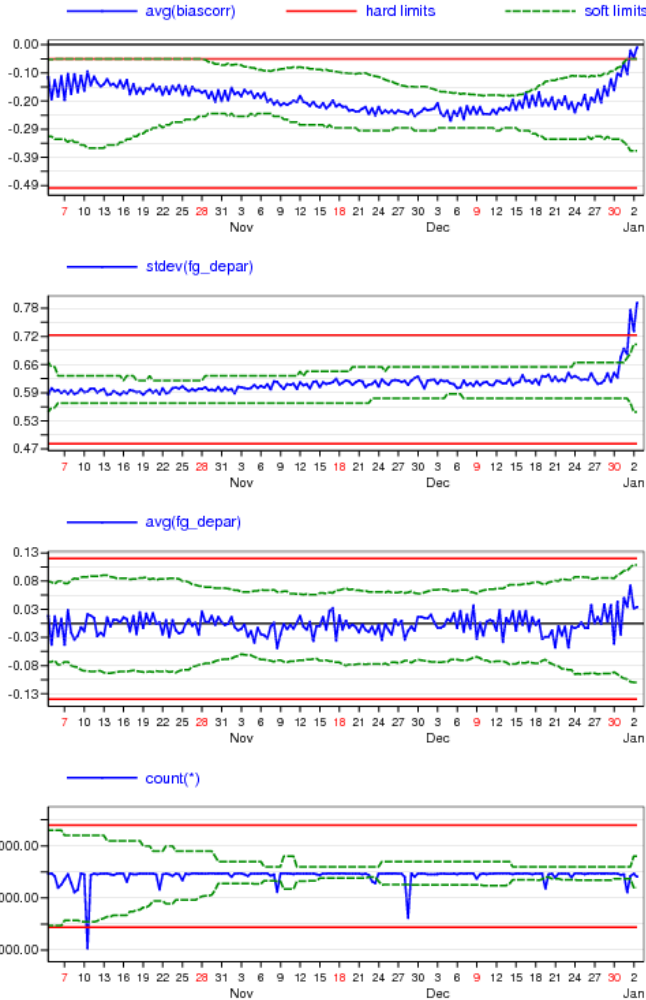

Statistics for RADIANCES from METOP-A/AMSUA (Global)
Channel = 13 [time step = 6 hours]
STDV OF FIRST GUESS DEPARTURE (OBS-FG) , All
EXP = 0001, Data Period = 2012111421 - 2013010403
Min: 0.436 Max: 3.487 Mean: 0.595

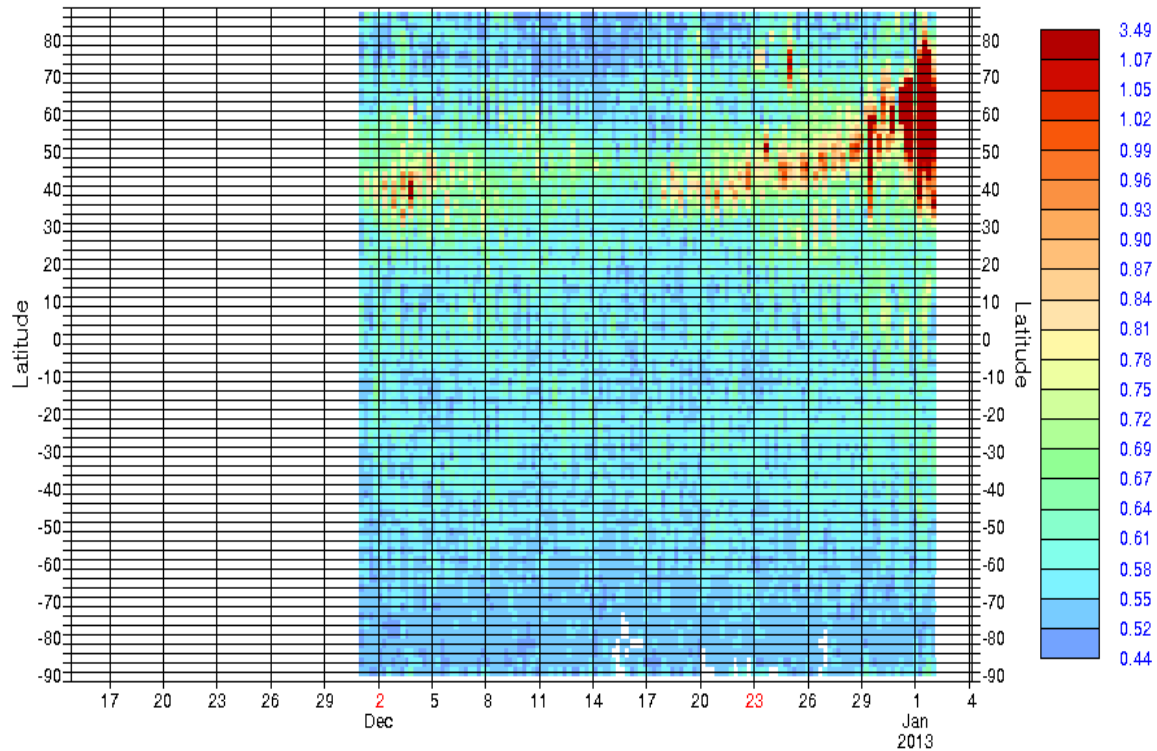

Thank you for your attention